

VX-920 Series

VHF Band Service Manual

©2005 VERTEX STANDARD CO., LTD.

EC033N90A

VERTEX STANDARD CO., LTD.

4-8-8 Nakameguro, Meguro-Ku, Tokyo 153-8644, Japan

VERTEX STANDARD

US Headquarters

10900 Walker Street, Cypress, CA 90630, U.S.A.

YAESU EUROPE B.V.


P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

YAESU UK LTD.

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.

VERTEX STANDARD HK LTD.

Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,
Kwun Tong, Kowloon, Hong Kong

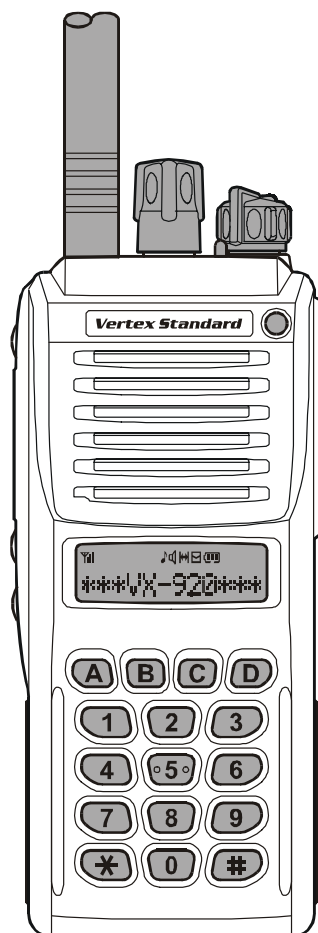

Introduction

This manual provides the technical information necessary for servicing the VX-920 Series Transceiver.

Servicing this equipment requires expertise in handling surface-mount chip components. Attempts by non-qualified persons to service this equipment may result in permanent damage not covered by the warranty, and may be illegal in some countries.

Two PCB layout diagrams are provided for each double-sided board in this transceiver. Each side of the board is referred to by the type of the majority of components installed on that side ("Side A" or "Side B"). In most cases one side has only chip components (surface-mount devices), and the other has either a mixture of both chip and leaded components (trimmers, coils, electrolytic capacitors, ICs, etc.), or leaded components only.

As described in the pages to follow, the advanced microprocessor design of the VX-920 Series Transceiver allows a complete alignment of this transceiver to be performed without opening the case of the radio; all adjustments can be performed from the front panel, using the "Alignment Mode" menu.

While we believe the information in this manual to be correct, VERTEX STANDARD assumes no liability for damage that may occur as a result of typographical or other errors that may be present. Your cooperation in pointing out any inconsistencies in the technical information would be appreciated.

Contents

Specifications	2
Exploded View & Miscellaneous Parts	3
Block Diagram	5
Circuit Description	7
Alignment	11
Board Units (Schematics, Layouts & Parts)	
Main Unit	15
Display Unit	37
Cable Unit	43

Specifications

General

Frequency range:	134-174 MHz
Channel / Group:	48 CH / 3 Groups (w/o LCD version) 512 CH / 32 Groups (w/ LCD version)
Channel Spacing:	12.5/15/20/25/30 kHz
PLL Stepping:	1.25/2.5/5/6.25/7.5 kHz
Power Supply Voltage:	7.4 V
Current Consumption:	30 mA (Standby w/saver) 75 mA (Standby) 200 mA (Receive) 1.7 A (Transmit)
Battery Life (Approx.):	7 hours (w/ FNB-V86LI) 12 hours (w/ FNB-V87LI)
Operating Temperature Range:	-22 °F to +140 °F (-30 °C to +60 °C)
Frequency Stability:	±2.5ppm
Case Size (W x H x D):	2.24" x 5.24" x 1.48" (57 x 133 x 37.5 mm)
Weight (Approx.):	13.1 oz (370g) (w/FNB-V86LI, ATV-8B, CLIP-920)

Receiver (Measurement per TIA/EIA-603)


Circuit Type:	Double Conversion Super-heterodyne
Sensitivity (12dB SINAD):	0.25 µV/0.32 µV(W/N)
Adjacent Channel Selectivity:	75/70 dB (W/N)
Intermodulation:	75/70 dB (W/N)
Spurious Response Rejection:	80 dB
Num & Noise:	48/42 dB (W/N)
Audio output:	700 mW @ 16 ohms 5% THD
Spurious Emissions:	-57 dBm

Transmitter (Measurement per TIA/EIA-603)

RF Power Output:	5/2.5/1/0.25 W
Modulation Type:	Direct FM (16K0F3E/11K0F3E)
Maximum Frequency Deviation:	±2.5/±4.0/±5.0 kHz
FM Hum & Noise:	45/40 dB (W/N)
Audio Distortion:	Less than 3% @ 1kHz
Spurious Emissions:	-36 dBm @under 1 GHz -30 dBm @above 1 GHz

Specifications subject to change without notice or obligation.

Exploded View & Miscellaneous Parts

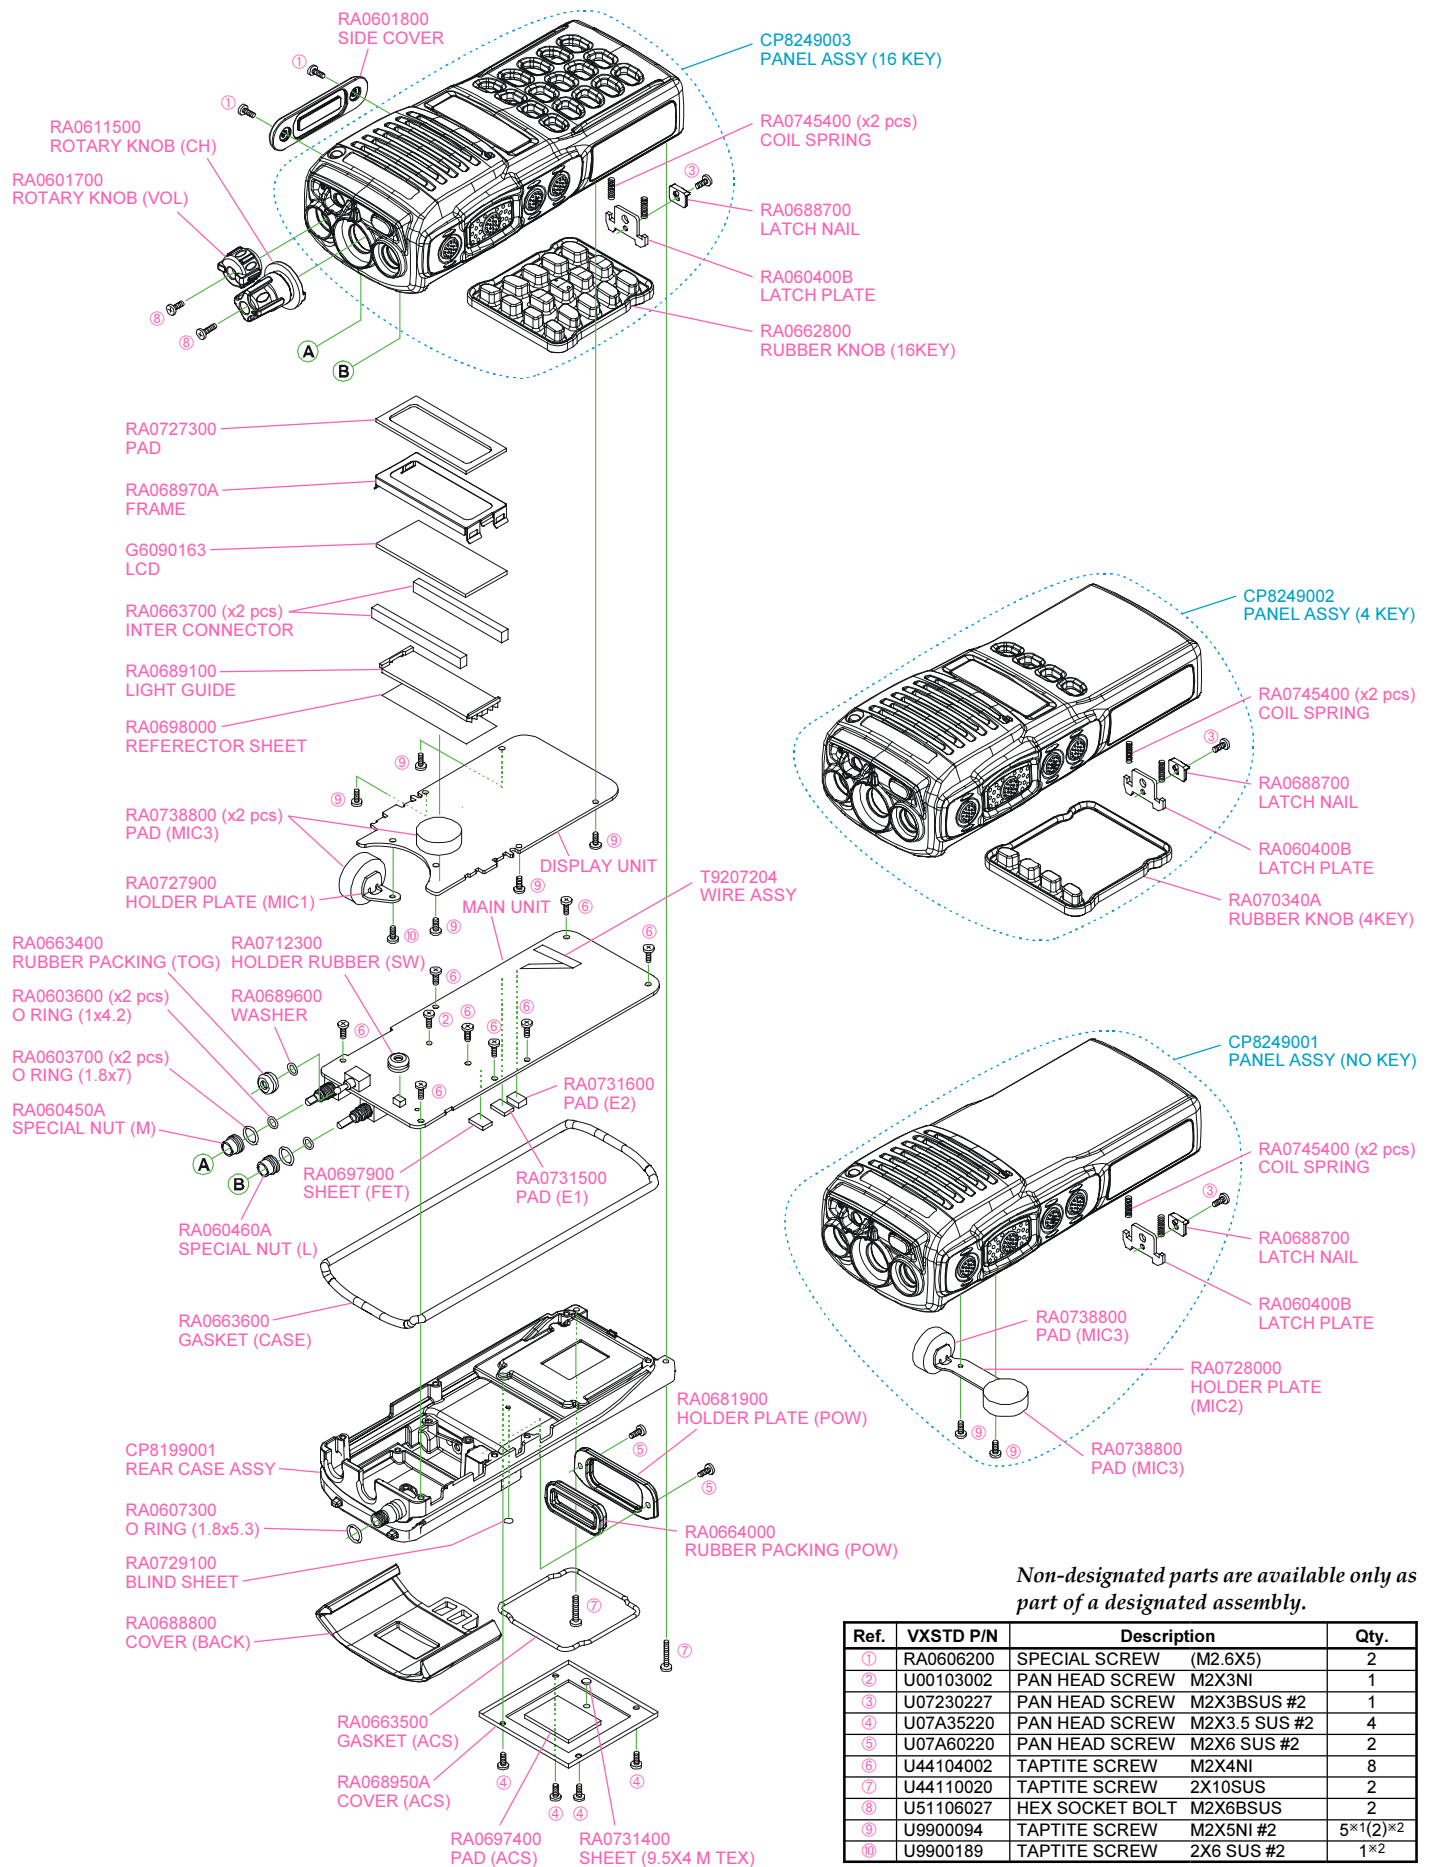

Non-designated parts are available only as part of a designated assembly.


Ref.	VXSTD P/N	Description	Qty.
①	RA0606200	SPECIAL SCREW (M2.6X5)	2
②	U00103002	PAN HEAD SCREW M2X3NI	1
③	U07230227	PAN HEAD SCREW M2X3BSUS #2	1
④	U07A35220	PAN HEAD SCREW M2X3.5 SUS #2	4
⑤	U07A60220	PAN HEAD SCREW M2X6 SUS #2	2
⑥	U44104002	TAPTITE SCREW M2X4NI	8
⑦	U44110020	TAPTITE SCREW 2X10SUS	2
⑧	U51106027	HEX SOCKET BOLT M2X6BSUS	2
⑨	U9900094	TAPTITE SCREW M2X5NI #2	5×1(2)×2
⑩	U9900189	TAPTITE SCREW 2X6 SUS #2	1×2

※1: w/ LCD, ※2: w/o LCD

Exploded View & Miscellaneous Parts


Note

Main Unit

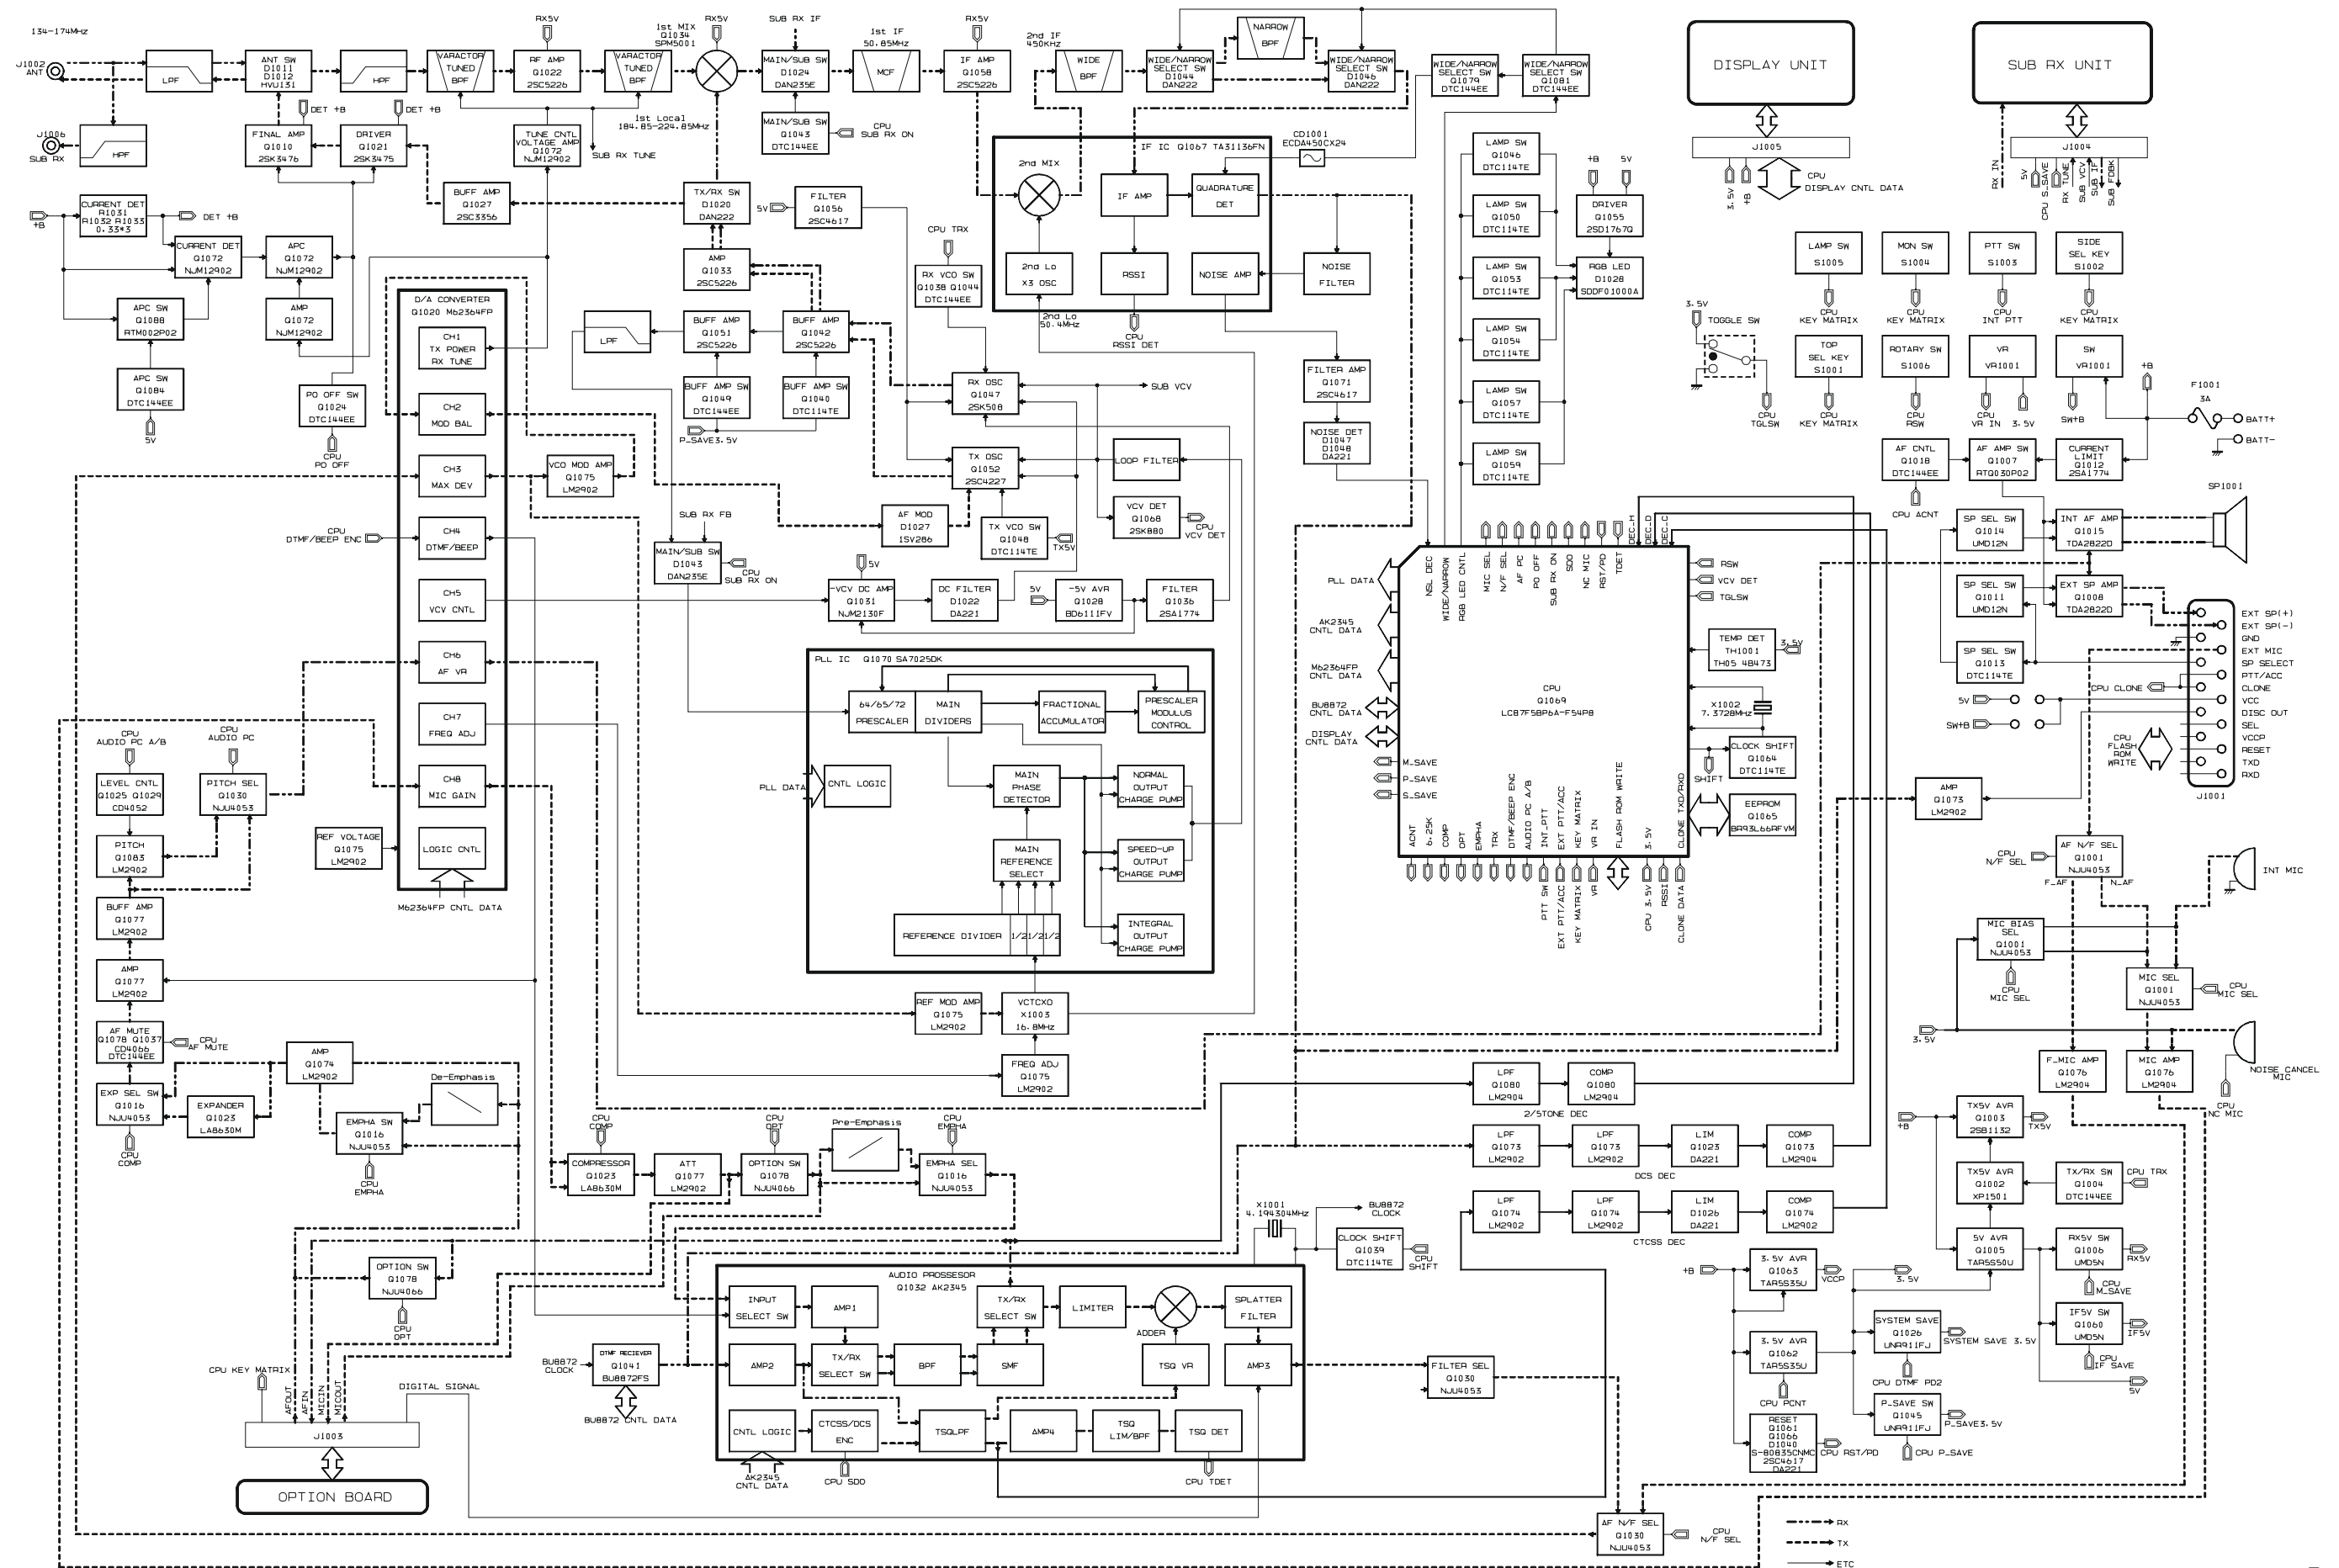

Block Diagram

Display Unit

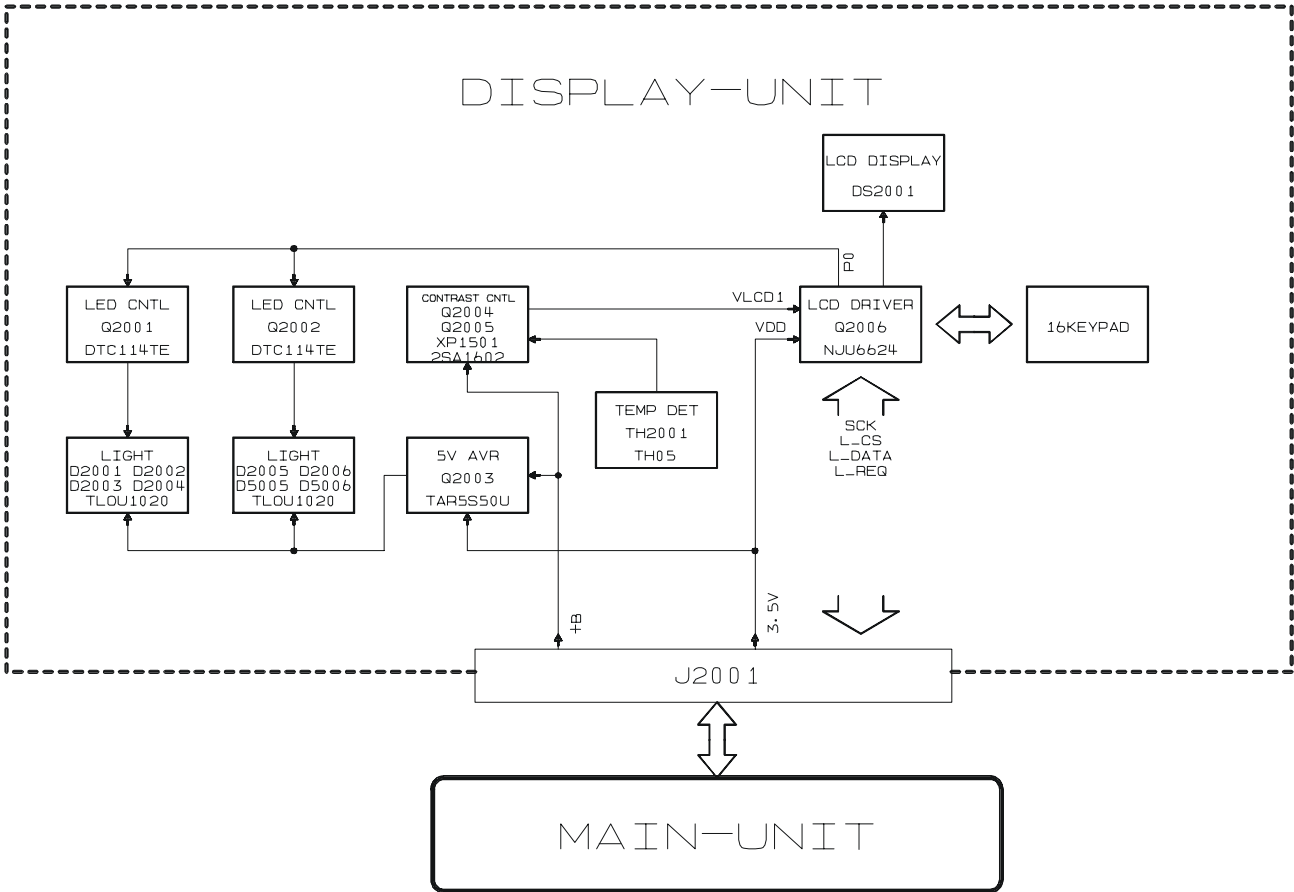

1. Circuit Configuration by Frequency

The receiver is a double-conversion superheterodyne type, with a first Intermediate Frequency (IF) of 50.85 MHz and a second IF of 450 kHz. Incoming signals from the antenna are mixed with the local signal from the VCO/PLL to produce the first IF of 50.85 MHz. The signals are then mixed with the 50.4 MHz second local oscillator output to produce the 450 kHz second IF. This is detected to give the demodulated signal. The transmit signal frequency is generated by the PLL VCO, and modulated by the signal from the microphone. It is then amplified and sent to the antenna.

2. Receiver System

2-1. Front-end RF amplifier

Incoming RF signals from the antenna are delivered to the Main Unit and pass through a Low-pass filter, antenna switching diode **D1011 (HVU131)**, and a high pass filter, and undesired out-of-band signals are then removed by a varactor-diode-tuned bandpass filter **D1014, D1015, D1049, and D1050 (all 1SV323)**. The residual signals are amplified by **Q1022 (2SC5226)** and then pass through a varactor-diode-tuned image-stripping band pass filter **D1018 and D1019 (both 1SV323)** prior to delivery to the 1st mixer.

2-2. First Mixer

The 1st mixer consists of **Q1034 (SPM5001)**, T1001, T1002, and T1003. Buffered output from the VCO is amplified by **Q1033 (2SC5226)** to provide a pure first local signal between 184.85 and 224.85 MHz for injection to the first mixer. The IF signal then passes through monolithic crystal filter **XF1001 (± 5.5 kHz BW)** to strip away undesired mixing products.

2-3. IF Amplifier

The first IF signal is amplified by **Q1058 (2SC5226)**. The amplified first IF signal is applied to FM IF subsystem IC **Q1067 (TA31136FN)** which contains the second mixer, second local oscillator, limiter amplifier, noise amplifier, and S-meter amplifier. The signal from reference oscillator **X1003** is multiplied by three by **Q1067 (TA31136FN)**, and then is mixed with the IF signal to produce a 450 kHz second IF.

The second IF signal then passes through the ceramic

filter **CF1001** (wide channels), **CF1002** (narrow channels) to strip away all but the desired signal, and is applied to the limiter amplifier in **Q1067 (TA31136FN)**, which removes amplitude variations in the 450 kHz IF, before detection of the speech by the ceramic discriminator **CD1001**.

2-4. Audio amplifier

Detected audio from **Q1067 (TA31136FN)** is applied to **Q1032 (AK2345)** and is fed to the bandpass filter inside **Q1032 (AK2345)**.

If an optional signaling unit is installed, **Q1078 (NJU4066BV)** is set to "OFF," and the AF signal from **Q1032 (AK2345)** is fed to the optional unit. If a signaling unit is not installed, **Q1078 (NJU4066BV)** is switched "ON," and the signal passes through **Q1078 (NJU4066BV)**. The signal then proceeds through the de-emphasis stage and the expander at **Q1023 (LA8630M)**. When the expander function is off, the signal will be bypassed via **Q1016 (NJU4053BV)**. The output signal of the expander (or a signal from de-emphasis) goes through AF mute switch **Q1078 (CD4066BV)** and is amplified by **Q1077 (LM2902PWR)**. The signal then proceeds to **Q1030 (NJU4053BV)** when the audio equalizer is "OFF;" if the audio equalizer is "ON," the signal from **Q1077 (LM2902PWR)** passes to the buffer amplifier **Q1077 (LM2902PWR)** for audio equalization at **Q1083 (LM2902PWR)** and **Q1025/Q1029 (both CD4052BPWR)**. The signal then is fed to **Q1030 (NJU4053BV)**. The output from **Q1030 (NJU4053BV)** is amplified by the AF power amplifier **Q1015 (TDA2822)** after passing through the AF volume control **Q1020 (M62364FP)**. The output of **Q1015 (TDA2822)** drives the internal speaker.

2-5. Squelch Circuit

There are 13 levels of squelch setting, from "0" to "12." The level "0" corresponds to an "open" squelch. The level "1" is the lowest squelch threshold setting level, and level "11" means tight squelch. From "2" to "10" are intermediate, increasingly-tight settings. The level "12" represents carrier squelch.

2-5-1. Noise Squelch

The Noise Squelch circuit is composed of the bandpass filter at **Q1067 (TA31136FN)**, noise ampli-

Circuit Description

fier **Q1071 (2SC4617)**, and noise detector **D1047/D1048 (both DA221)**. When a carrier is not being received, the noise components passed from demodulator **Q1067 (TA31136FN)** are amplified by **Q1071 (2SC4617)**, fed through bandpass filter **Q1067 (TA31136FN)**, detected as a DC voltage by **D1047/D1048 (both DA221)**, and applied to pin 16 (the A/D port) of **Q1069 (CPU: LC87F5BP6A)**. When a carrier is received, the DC voltage becomes low because the noise is compressed. When the detected voltage to the CPU is high, the CPU stops AF output by setting **Q1078 (CD4066BV)** “OFF” (by making pin 59 of the CPU “Low” level. When the detection voltage is low, the CPU switches **Q1078 (CD4066BV)** “ON” by making pin 59 “High,” and the AF signal is allowed to flow.

2-5-2. Carrier Squelch

The pin 15 (A/D port) of CPU **Q1069 (LC87F5BP6A)** detects the RSSI voltage output from **Q1067 (TA31136FN)** at pin 12, and controls the AF output. The RSSI output voltage changes according to the signal strength of carrier; a stronger signal makes the RSSI voltage higher. The processing of the AF signal control is same as Noise Squelch, except that the switching threshold is adjusted so as to be 3 dB higher than the “tight squelch” sensitivity.

3. Transmitter System

3-1. MIC Amplifier

The AF signal from the internal microphone (pin 4 of J1001) or an external microphone (pin 19) passes through microphone selection switch **Q1001 (NJU4053BV)** and is amplified by microphone amplifier **Q1076 (LM2904PWR)**, thereafter passing through the microphone gain controller, **Q1020 (M62364FP)**. The AF signal then passes through compandor **Q1023 (LA8630M)**. When not using the compandor, the CPU bypasses the compandor circuit and feeds the signal to the pre-emphasis circuit. **Q1078 (CD4066BV)** becomes “OFF” when an optional signaling unit is attached, and the AF signal from **Q1023 (LA8630M)** is redirected via the signaling unit. If a signaling unit is not installed, **Q1078 (CD4066BV)** becomes “ON,” the signal bypasses **Q1078 (CD4066BV)**, and it instead is applied to the pre-emphasis amplifier **Q1032 (AK2345)**. The sig-

nal passes through the limiter and splatter filter of **Q1032 (AK2345)**, and is adjusted for proper deviation at **Q1020 (M62364FP)**. The low frequency signal components (CTCSS, DCS, etc.) are then amplified by **Q1075 (LM2902PWR)** and used for direct modulation of the reference oscillator, TCXO **X1003**. The high frequency signal components are amplified by **Q1075 (LM2902PWR)**, and their level is set by **Q1020 (M62364FP)** to establish proper balance of the level between high- and low-frequency components. After that, the signals modulate the transmit carrier via modulator **D1027 (1SV286)** of the VCO.

3-2. Noise Canceling Microphone Signal Path

The two signals from the internal microphones (main and sub) are applied to the positive input (sub) and to the negative input (main) of **Q1076 (LM2904PWR)**. If the same signal is applied to both the main and sub inputs, the “main” signal will be canceled at the output of **Q1076 (LM2904PWR)**, Pin 7. In other words, noise from nearby sources not directly involved in communication enters the main and sub input at the same signal and is therefore canceled out. When a signal is only applied to the main path, and there is no signal at sub, the main signal will be passed as-is from **Q1076 (LM2904PWR)**.

3-3. Drive and Final Amplifier Stages

The modulated signal from VCO **Q1052 (2SC4227)** is buffered by **Q1042 (2SC5226)** and amplified by **Q1033 (2SC5226)**. Then the signal is buffered by **Q1027 (2SC3356)** for delivery to the final amplifier driver **Q1021 (2SK3475)**. The low-level transmit signal is then applied to **Q1010 (2SK3476)** for final amplification up to 5 watts output power. The transmit signal then passes through the antenna switch **D1012 (HVU131)** and is low-pass filtered to suppress harmonic spurious radiation before delivery to the antenna.

3-4. Automatic Transmit Power Control

The current detector **Q1072 (NJM12902V)** detects the current drawn by **Q1010 (2SK3476)** and **Q1021 (2SK3475)**, and converts the current difference to a voltage difference. The output from the current de-

tector **Q1072 (NJM12902V)** is compared with the reference voltage and amplified by the power control amplifier **Q1072 (NJM12902V)**. The output from **Q1072 (NJM12902V)** controls the gate bias of the final amplifier **Q1010 (2SK3476)** and the driver **Q1021 (2SK3475)**. The reference voltage switches among four values of TX Power (“High,” “Low3,” “Low2,” and “Low1”), as controlled by **Q1020 (M62364FP)**.

3-5. PLL Frequency Synthesizer

The frequency synthesizer consists of PLL IC **Q1070 (SA7025DK)**, the VCO, TCXO (**X1003**), and buffer amplifier. The output frequency from the TCXO is 16.8 MHz, and the tolerance is ± 2.5 ppm (in the temperature range -30°C to $+60^{\circ}\text{C}$).

3-5-1. VCO (Voltage-Controlled Oscillator)

While the radio is receiving, the RX oscillator **Q1047 (2SK508)** in the VCO generates a programmed frequency between 184.85 and 224.85 MHz as the 1st local signal. While the radio is transmitting, the TX oscillator **Q1052 (2SC4227)** in the VCO generates a frequency between 134 and 174 MHz (the actual transmitting frequency). The output from the oscillator is amplified by buffer amplifier **Q1042 (2SC5226)** and becomes the output of the VCO. The output from VCO is divided: one part is amplified by **Q1051 (2SC5226)** and fed back to the PLL IC at pin 5. The other is amplified by **Q1033 (2SC5226)** and, in case of the reception, it is fed via **D1020 (DAN222)** to the mixer as the 1st local signal. On transmit, it is buffered **Q1027 (2SC3356)**, and passed through **D1020 (DAN222)** to amplifier **Q1021 (2SK2375)** and then fed to the final amplifier **Q1010 (2SK2376)**.

3-5-2. VCV (Varactor Control Voltage) Control

The tuning voltage (VCV) of the VCO establishes the lock range of the VCO by controlling the anode of a varactor diode using a negative voltage and the

control voltage from PLL IC **Q1070 (SA7025DK)**. The negative voltage is fed to the varactor diode after conversion to a negative value at **Q1031 (NJM2130F)**, using the output voltage of the D/A converter, **Q1020 (M62364FP)**.

3-5-3. PLL

The PLL IC **Q1070 (SA7025DK)** consists of a reference divider, main divider, phase detector, charge pumps and a fractional accumulator. The reference frequency from TCXO is applied to pin 8 of the PLL IC **Q1070 (SA7025DK)** and is divided by the reference divider. This IC is a decimal point dividing PLL IC, and the dividing ratio becomes 1/8 of the usual PLL frequency step. Therefore, the output of reference divider is 8 times the frequency of the channel step. For example, when the channel steps are set to 5 kHz, the output of reference divider becomes 40 kHz. The feedback signal from the VCO applied to 5 pin of the PLL IC **Q1070 (SA7025DK)** is divided according to the dividing ratio so as to become the same frequency as that of the output of reference divider. These two signals are compared by the phase detector, and a phase difference pulse is generated. The phase difference pulse and the pulse from the fractional accumulator pass through the charge pumps and low-pass filter, producing a DC voltage (VCV) to control the VCO. The oscillation frequency of the VCO is therefore locked via the control of this DC voltage. The PLL serial data from the CPU **Q1069 (LC87F5BP6A)** is sent with three lines of data: SDO (pin 20), SCK (pin 22) and PSTB (pin 27). The lock condition of the PLL is sent from the UL (pin 17) terminal, and UL becomes “High” at the time of a proper lock condition and becomes “Low” at the time of an unlocked condition. The CPU always watches over the UL condition, and when it becomes “Low” (unlocked condition), the CPU **Q1069 (LC87F5BP6A)** prohibits transmission and reception.

Circuit Description

Note

Introduction

The **VX-920** series is carefully aligned at the factory for the specified performance across the frequency range specified for each version. Realignment should therefore not be necessary except in the event of a component failure, or altering version type. All component replacement and service should be performed only by an authorized **Vertex Standard** representative, or the warranty policy may be void.

The following procedures cover the sometimes critical and tedious adjustments that are not normally required once the transceiver has left the factory. However, if damage occurs and some parts subsequently are placed, realignment may be required. If a sudden problem occurs during normal operation, it is likely due to component failure; realignment should not be done until after the faulty component has been replaced.

We recommend that servicing be performed only by authorized **Vertex Standard** service technicians who are experienced with the circuitry and fully equipped for repair and alignment. Therefore, if a fault is suspected, contact the dealer from whom the transceiver was purchased for instructions regarding repair. Authorized **Vertex Standard** service technicians realign all circuits and make complete performance checks to ensure compliance with factory specifications after replacing any faulty components.

Those who do undertake any of the following alignments are cautioned to proceed at their own risk. Problems caused by unauthorized attempts at realignment are not covered by the warranty policy. Also, **Vertex Standard** reserves the right to change circuits and alignment procedures in the interest of improved performance, without notifying owners.

Under no circumstances should any alignment be attempted unless the normal function and operation of the transceiver are clearly understood, the cause of the malfunction has been clearly pinpointed and any faulty components replaced, and realignment determined to be absolutely necessary.

The following test equipment (and thorough familiarity with its correct use) is necessary for complete realignment. Correction of problems caused by misalignment resulting from use of improper test equipment is not covered under the warranty policy. While most steps do not require all of the equipment listed, the interactions of some adjustments may require that more complex adjustments be performed afterwards. Do not attempt to perform only a single step unless it is clearly isolated electrically from all other steps. Have all test equipment ready before beginning, and follow all of the steps in a section in the order presented.

Required Test Equipment

- ☐ RF Signal Generator with calibrated output level at 200 MHz
- ☐ Deviation Meter (linear detector)
- ☐ In-line Wattmeter with 5 % accuracy at 200 MHz
- ☐ 50 Ohm RF Dummy Load with power rating 10 W at 200 MHz
- ☐ 16 Ohm AF Dummy Load (**Attention** : Audio output is BTL output)
- ☐ Regulated DC Power Supply (standard 7.5 V DC, 3 A)
- ☐ Frequency Counter with 0.2 ppm accuracy at 200 MHz
- ☐ Audio Generator
- ☐ AC Voltmeter
- ☐ DC Voltmeter
- ☐ VHF Sampling Coupler
- ☐ IBM PC / compatible Computer with Microsoft® Windows® 95 or later operating system
- ☐ Vertex Standard CE59 (version 2.06 or later) Alignment program and CT-109 PC Programming Cable or FIF-10A* USB Interface/CT-108 PC Programming Cable

※: When using the FIF-10A USB Interface, requires the Windows® 2000 or Windows® XP

Alignment

Alignment Preparation & Precautions

A 50-Ohm RF Dummy Load and in-line wattmeter must be connected to the main antenna jack in all procedures that call for transmission, except where specified otherwise. Correct alignment is not possible with an antenna.

After completing one step, read the following step to determine whether the same test equipment will be required. If not, remove the test equipment (except dummy load and wattmeter, in connected) before proceeding.

Correct alignment requires that the ambient temperature be the same as that of the transceiver and test equipment, and that this temperature be held constant between 68 and 86 °F (20 ~ 30 °C). When the transceiver is brought into the shop from hot or cold air, it should be allowed time to come to room temperature before alignment.

Whenever possible, alignments should be made with oscillator shields and circuit boards firmly affixed in place. Also, the test equipment must be thoroughly warmed up before beginning.

Note: Signal levels in dB referred to in the alignment procedure are based on 0 dBm EMF = 1 mV.


Setup the test equipment as shown for transceiver alignment, apply 7.5 V DC power to the transceiver. Refer to the drawings above for Alignment Points.

The transceiver must be programmed for use in the intended system before alignment is attempted. The RF parameters are loaded from the file during the alignment process.


In order to facilitate alignment over the complete switching range of the equipment it is recommended that the channel data in the transceiver is preset as the chart below.

CHANNEL	FREQUENCY
BAND-LOW	134.000 MHz
BAND-MID	154.000 MHz
BAND-HIGH	174.000 MHz

The alignment mode is accessed by “Alignment mode” command from the computer, and the alignment tool operates it automatically. During the alignment mode, normal operation is suspended. Use the alignment tool program running on PC.

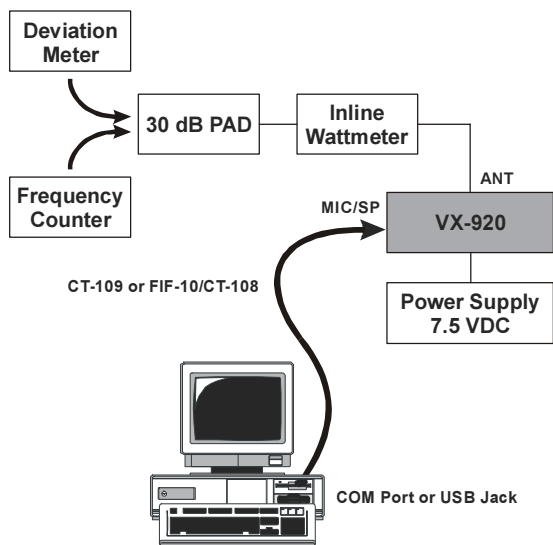

TRANSMITTER SECTION ALINGMENT SETUP

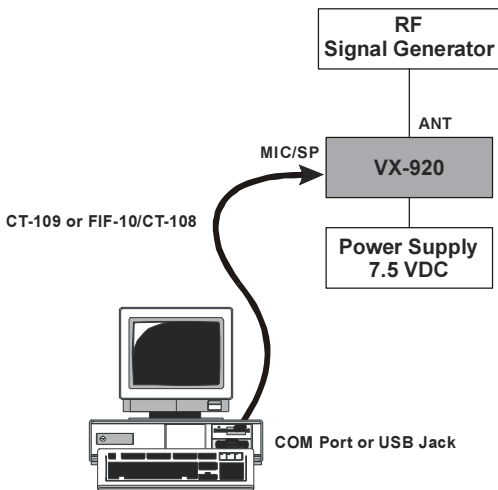

RECEIVER SECTION ALINGMENT SETUP

The Alignment Tool Outline

Installation the tool

- ❑ Install the CE59 (version 2.06 or later) to your PC.
- ❑ The re-alignment for **VX-920** series uses the "Alignment" menu of CE59.

Action of the switches


When the transceiver is in the "Alignment mode," the actions of the PTT switch and keys are ignored. All of the commands are remotely controlled by the PC.

Basic sequence

The data displayed in screen of this tool is temporary data, and you must take care to ensure the preservation of the command sequence which is specified below.

1. Enter the "Alignment mode"
2. Upload data from radio
3. Edit/set alignment data
4. Download data to radio

When you finish one alignment parameter, the tool will ask you "Save the Aligned Data?" If you select "Yes," the temporary data will updated. If you select "No," the tool will not update the temporary data and the setting will return to its original value.

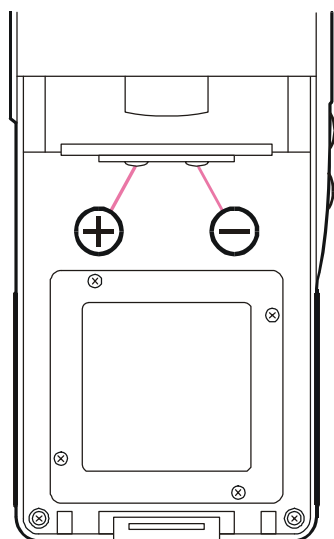

BATTERY TERMINAL POLARITY


Basic Alignment Mode

The Basic Alignment mode allows you to align the entire radio. The value of each parameter can be changed to the desired position by use of the "←" / "→" and up/down arrow keys, along with direct number input and dragging of the PC mouse.

To enter the Basic Alignment Mode, select "Basic Alignment" in the main "Radio" menu. It will start to "Upload" the written personalized data from the radio. Pressing the "OK" button will then start the Basic Alignment Mode.

Note: when all items are to be aligned, it is strongly recommended to align them according to following sequence. Detailed information for each step may be found in the "Help" file within CE59 (Clone Editor).

1. RX VCO Tune Voltage (RX VCO)
2. TX VCO Tune Voltage (TX VCO)
3. PLL Reference Frequency (Frequency)
4. RX Sensitivity (RX Tune)
5. Squelch (SQL)
6. TX Power
7. Maximum Deviation <Wide>
8. Maximum Deviation <Narrow>
9. Sub Audio Deviation <CTCSS>
10. Sub Audio Deviation <DCS>
11. Sub Receiver Sensitivity (RX Tune)

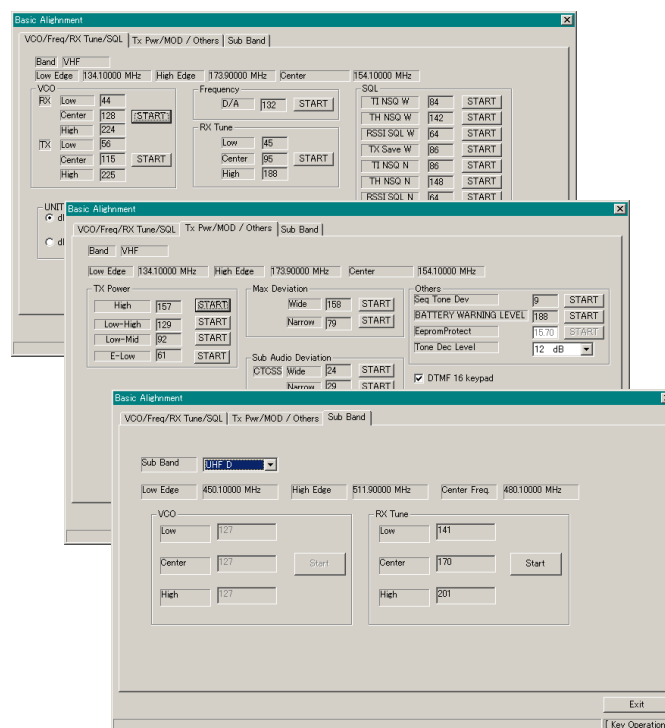



Alignment

CH (CHANNEL-BY-CHANNEL) Fine Alignment Mode


The CH Fine Alignment Mode allows you to align the radio separately for every operating channel. The value of each parameter can be changed to the desired position using the “←” / “→” and up/down arrow keys, direct number input, and by dragging the PC mouse.

To enter the CH Fine Alignment Mode, select “CH Fine Alignment” in the main “Radio” menu. It will start to “Upload” the written personalized data from the radio. Pressing the “OK” button will then start the CH Fine Alignment Mode.

Note: Detailed information for each step may be found in the “Help” file within CE59 (Clone Editor).

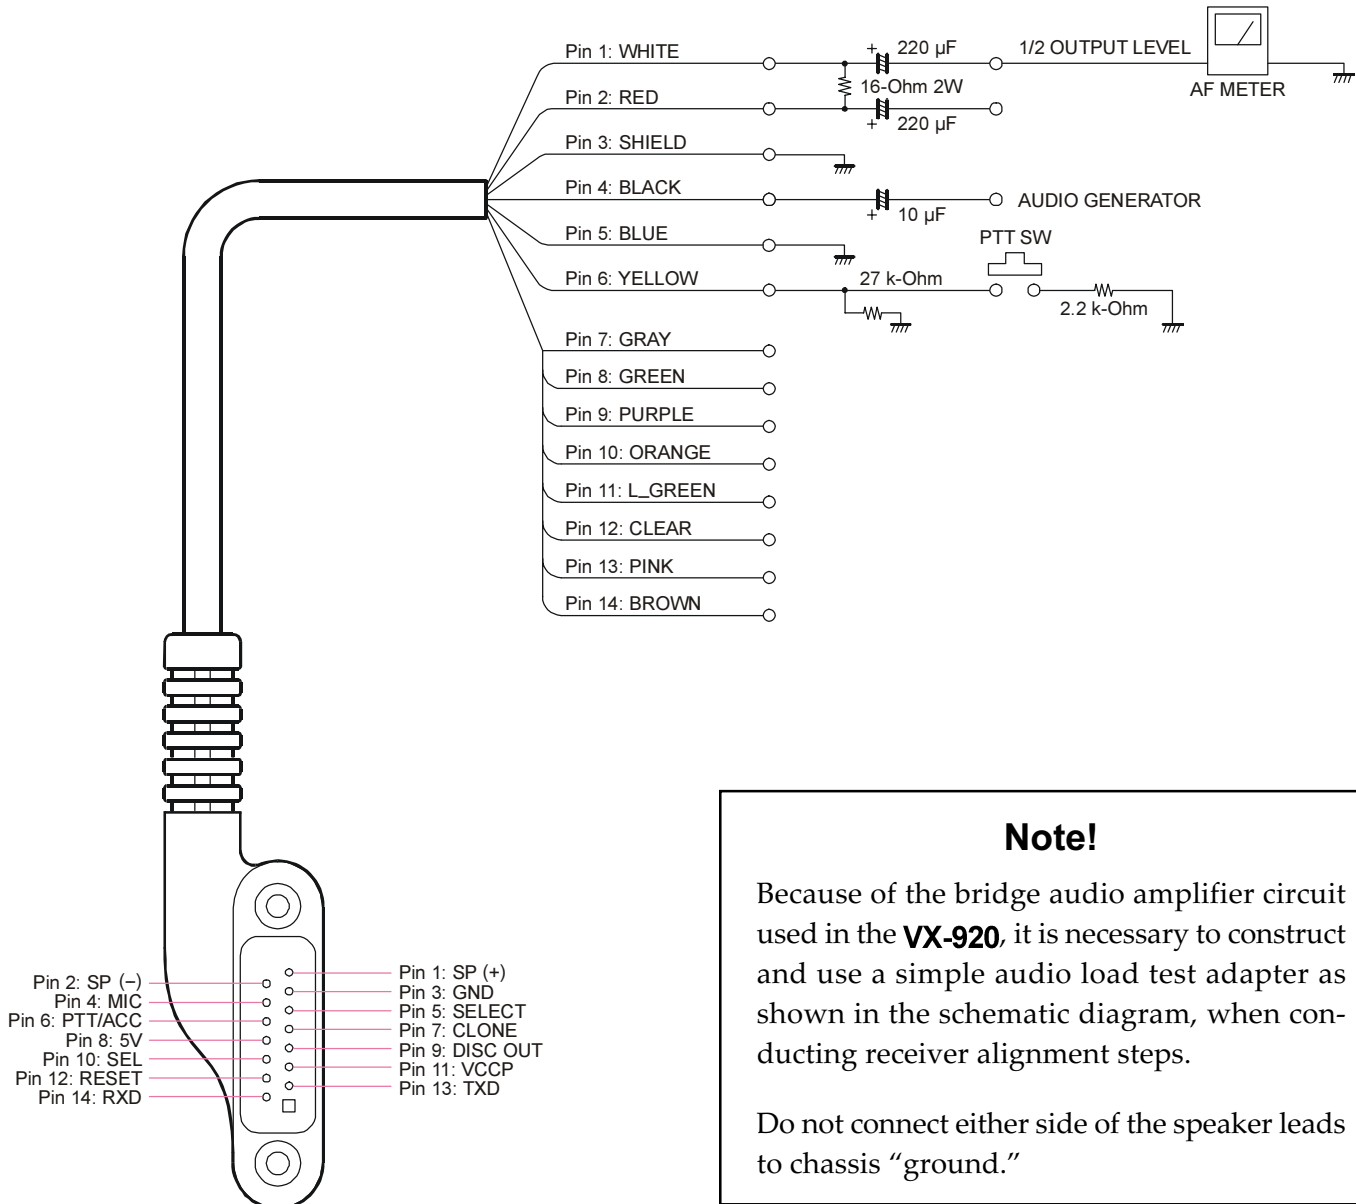
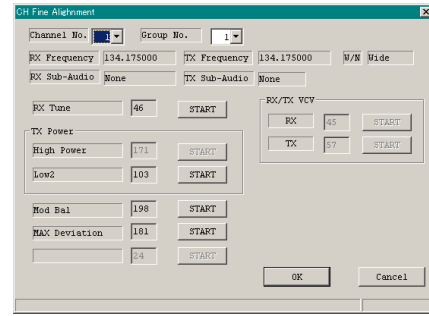


AF TEST ADAPTER SCHEMATIC


















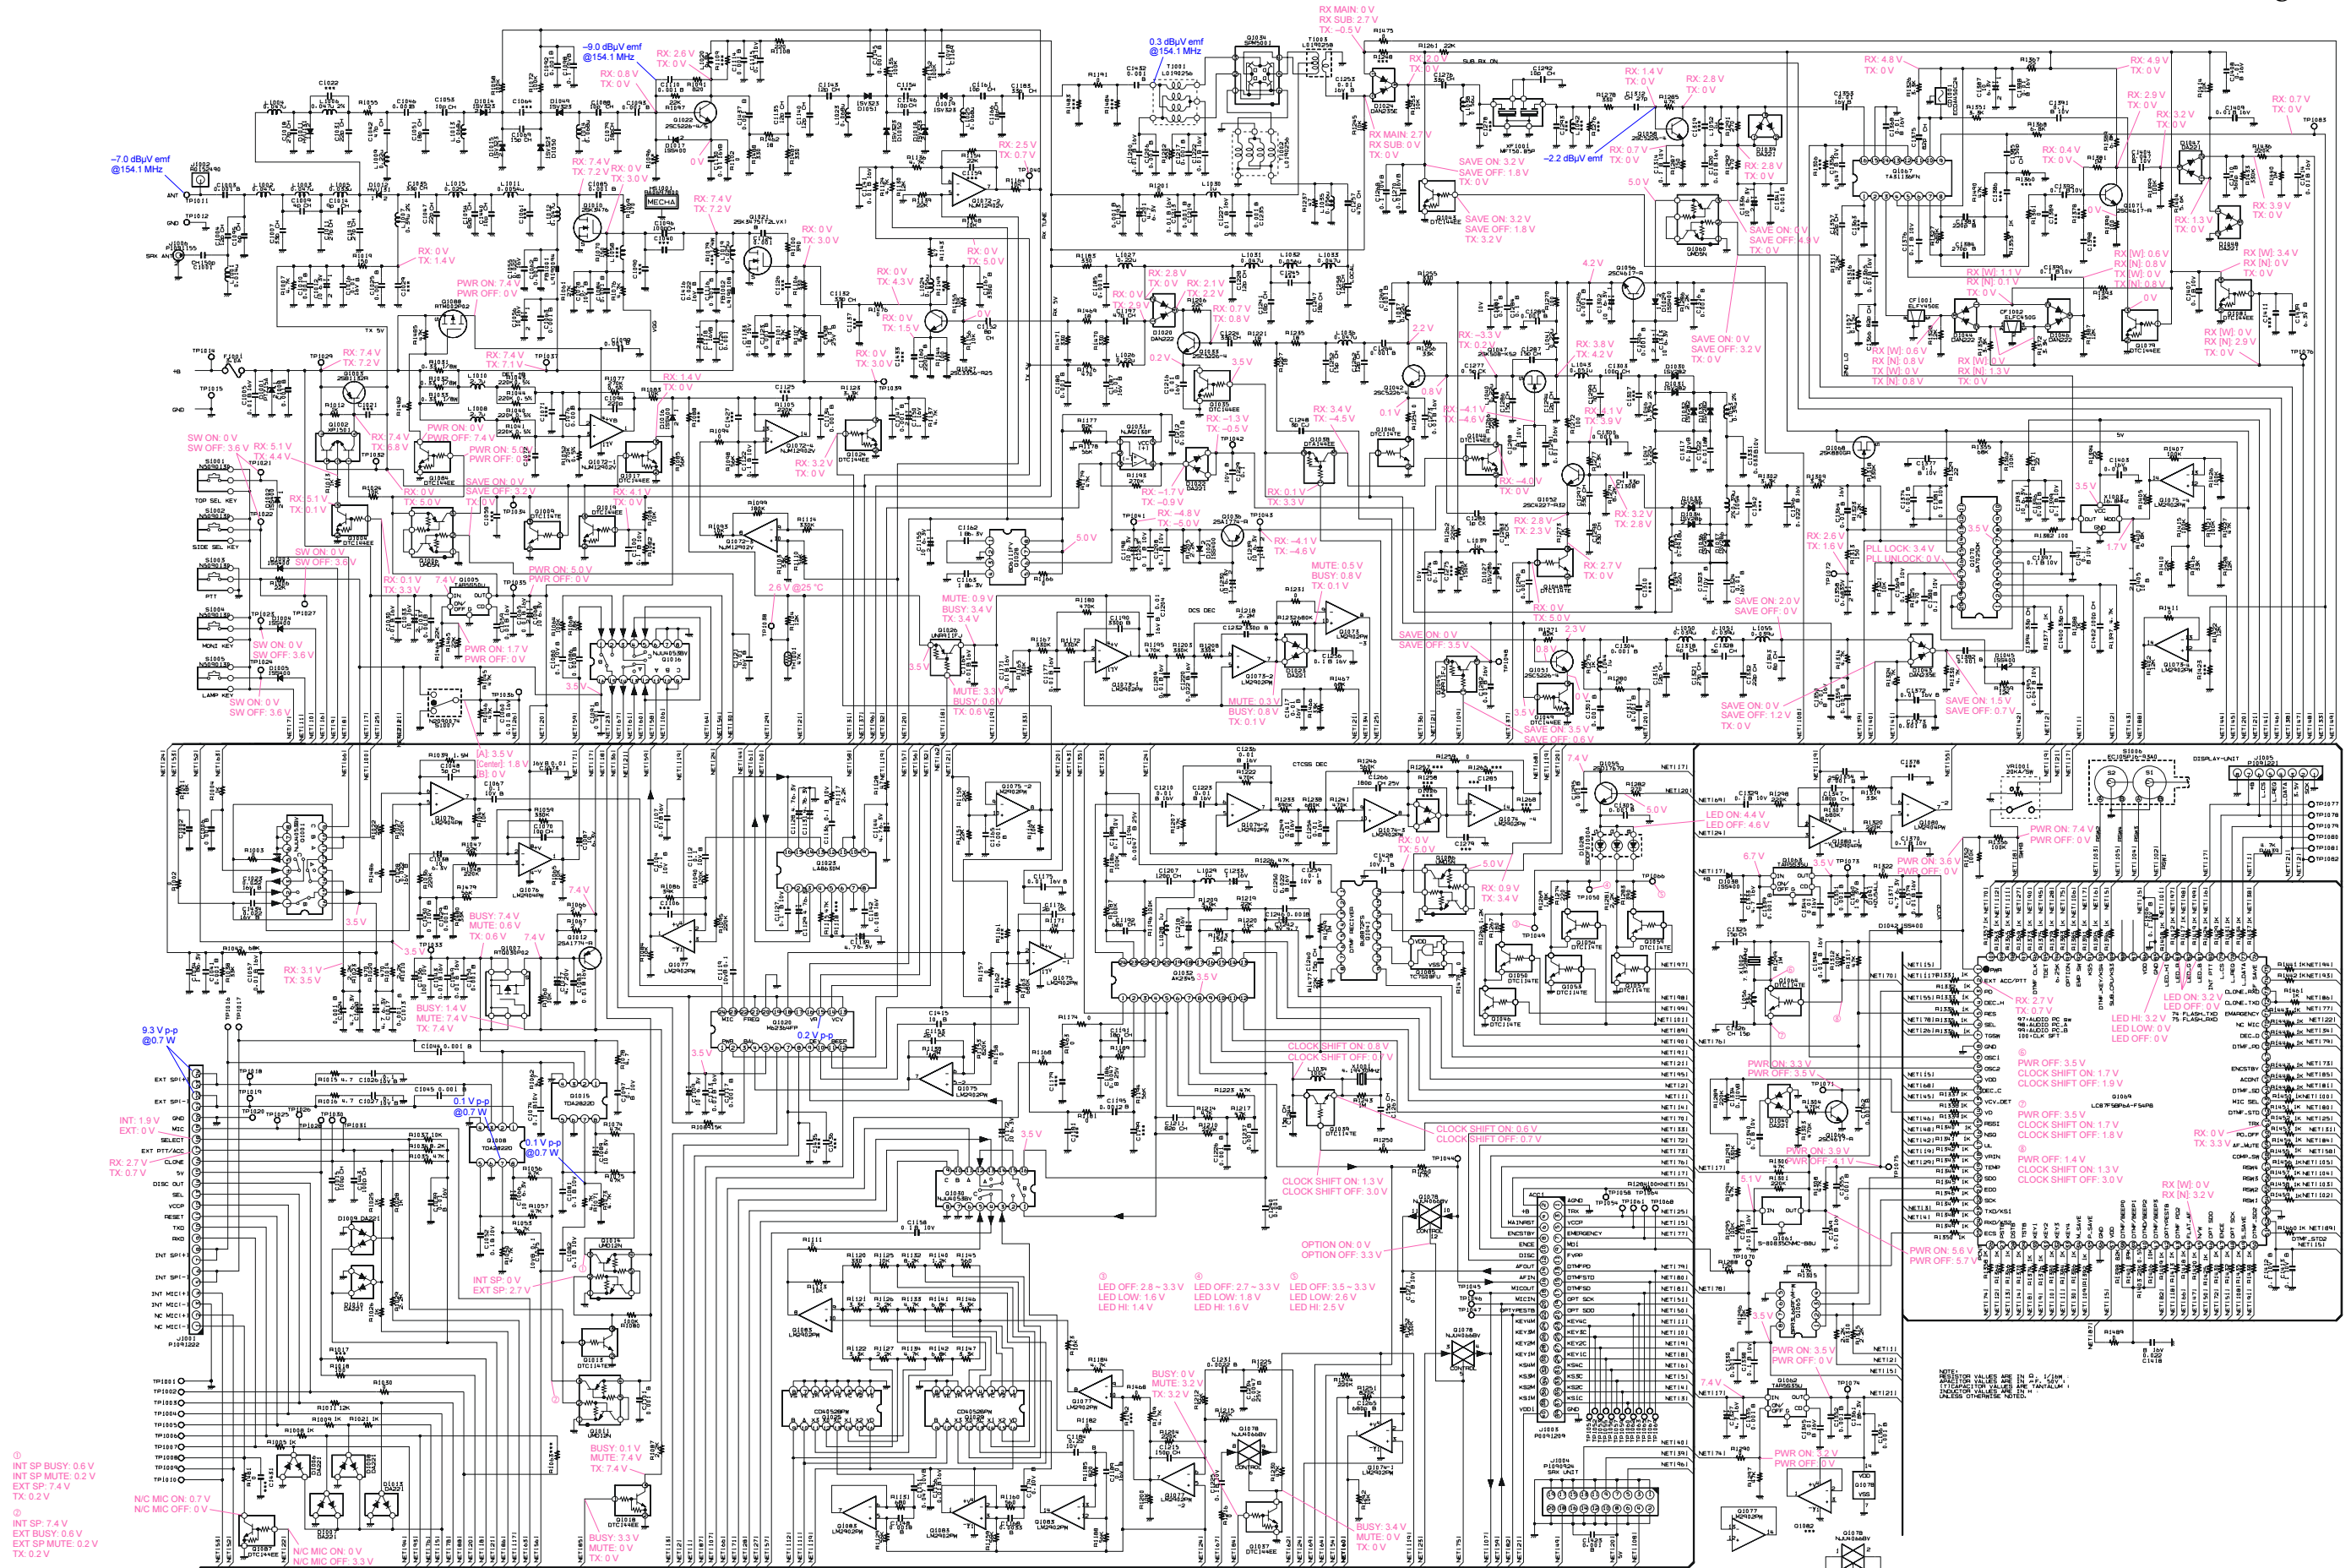


Main Unit

Parts Layout (Side A)

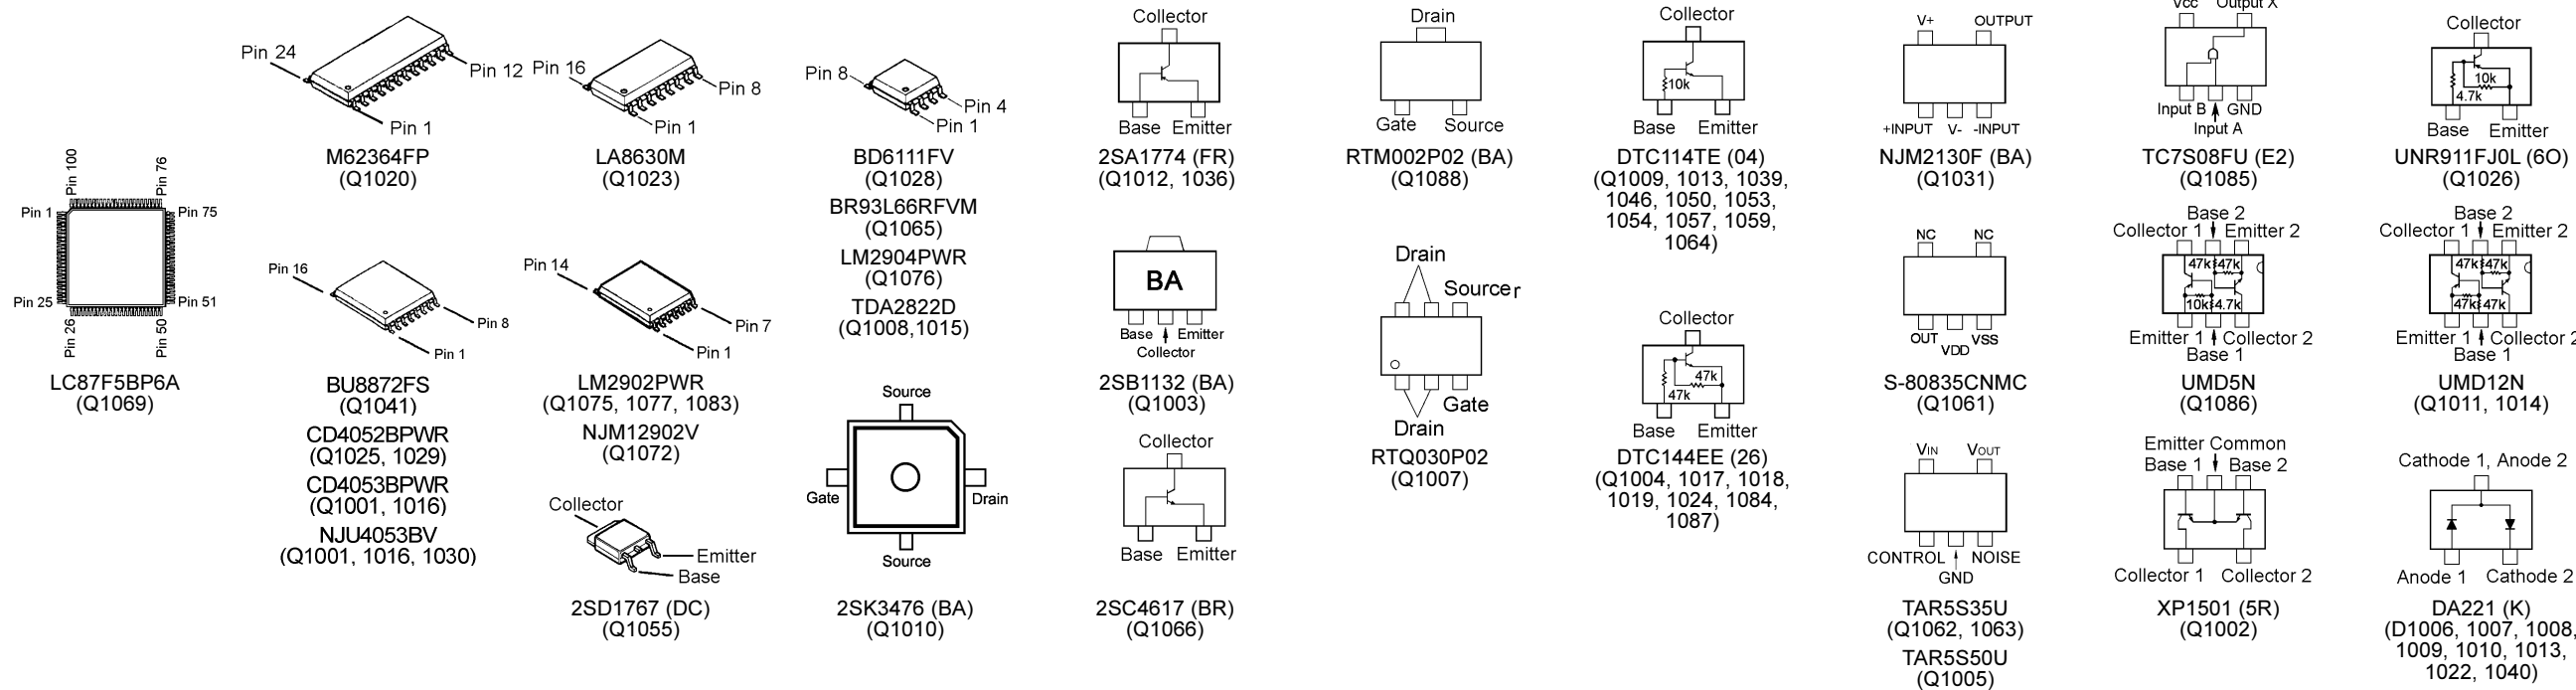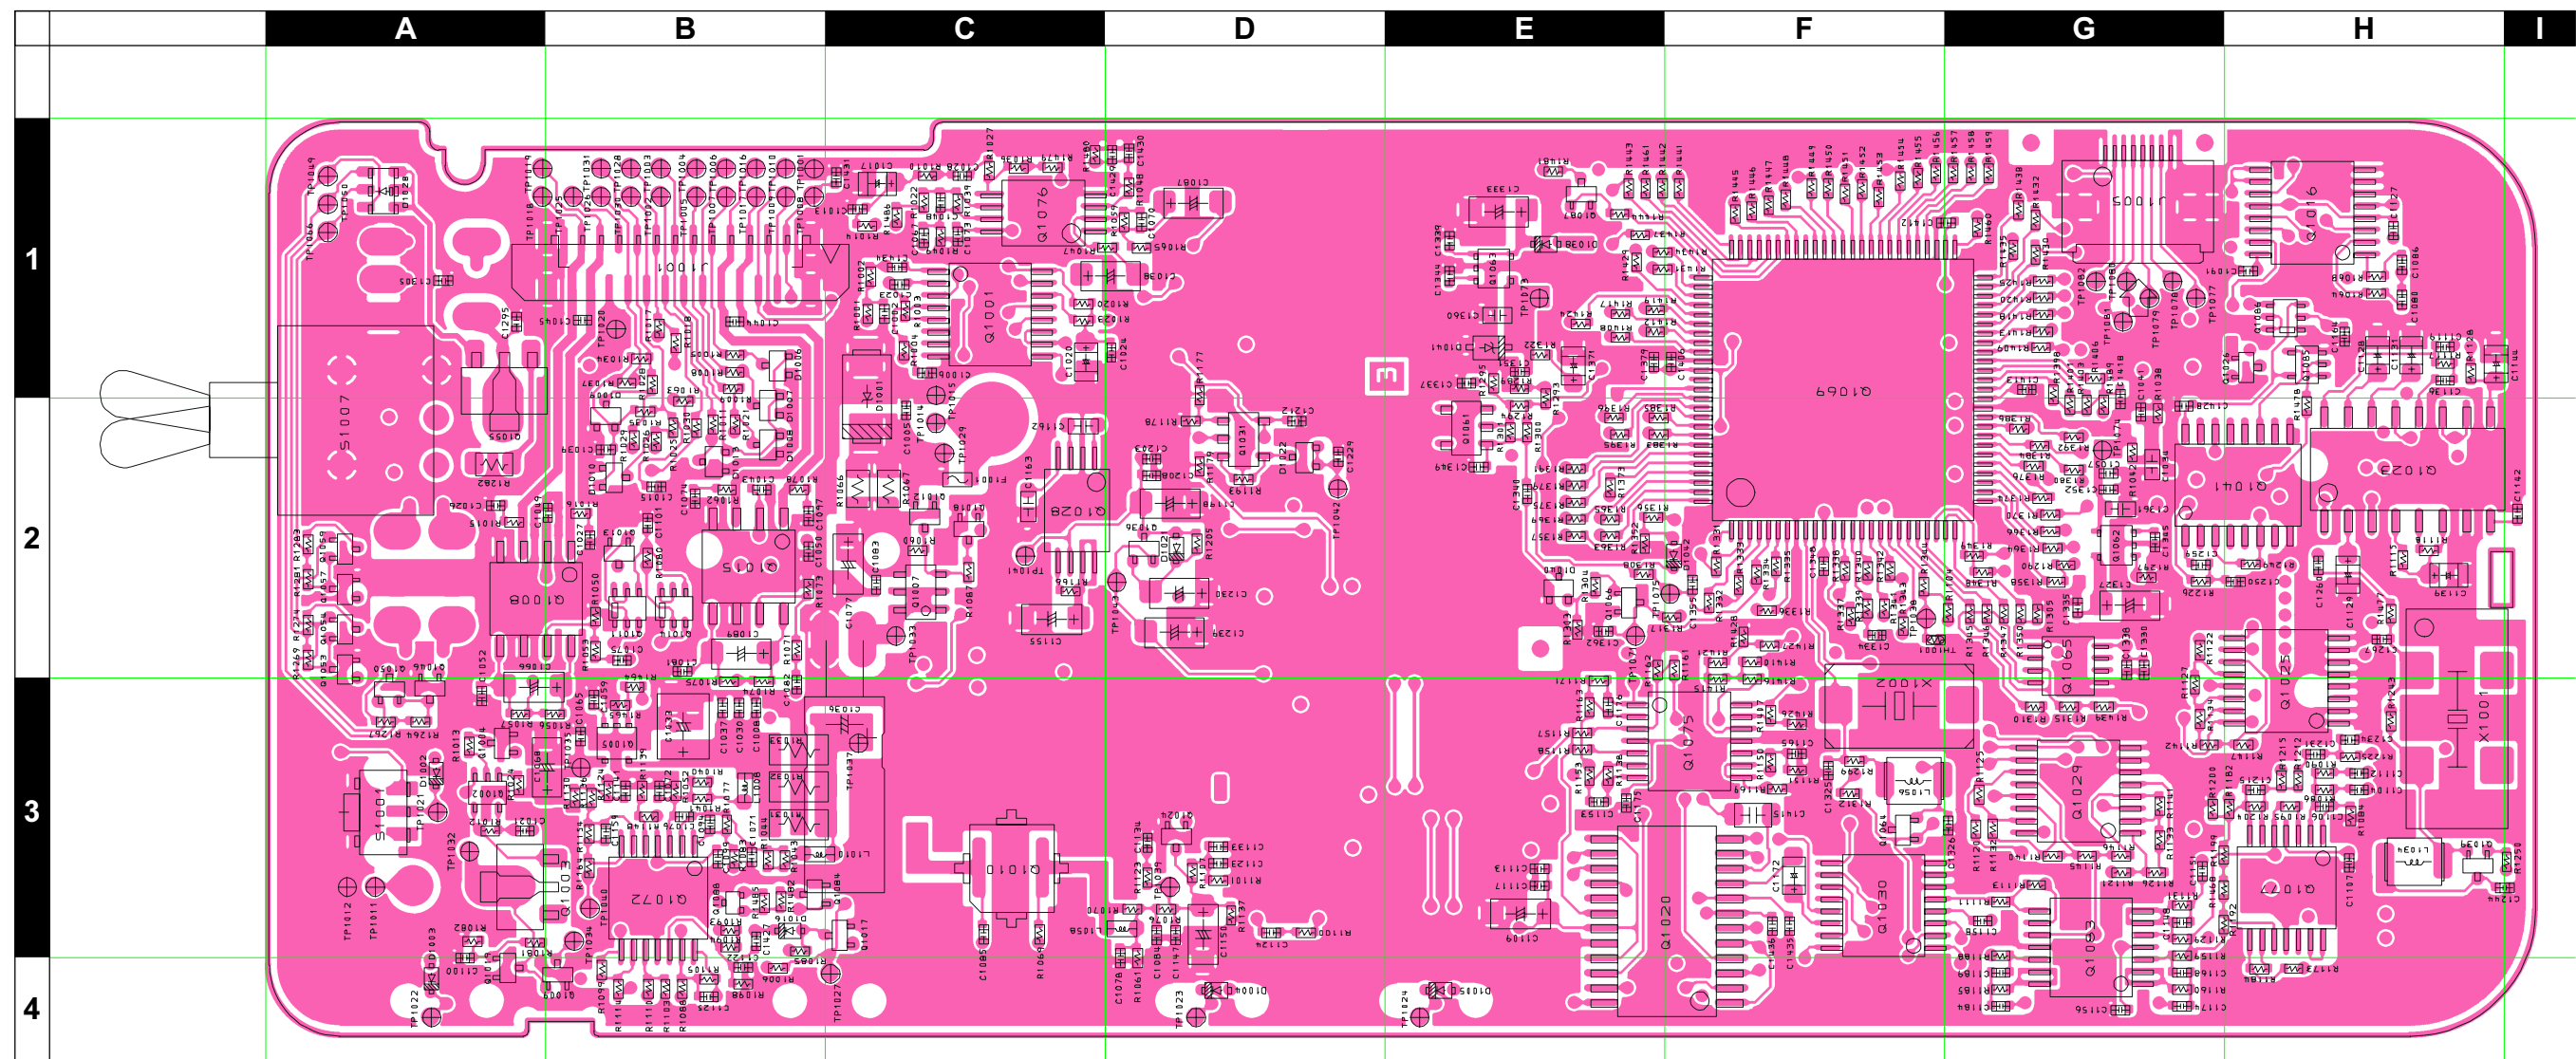

Parts Layout (Side B)

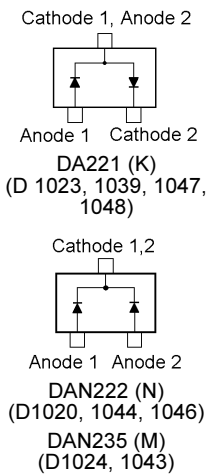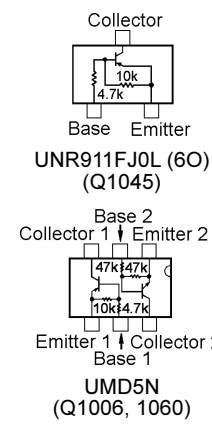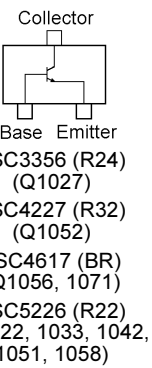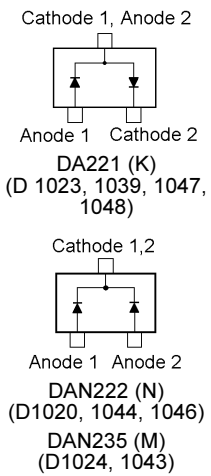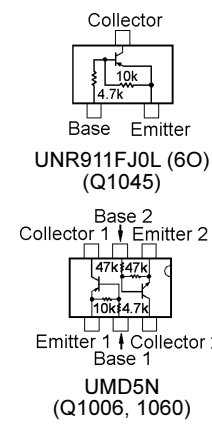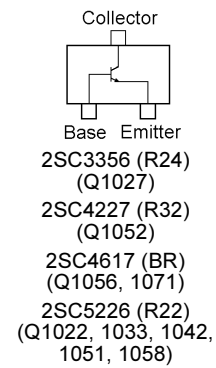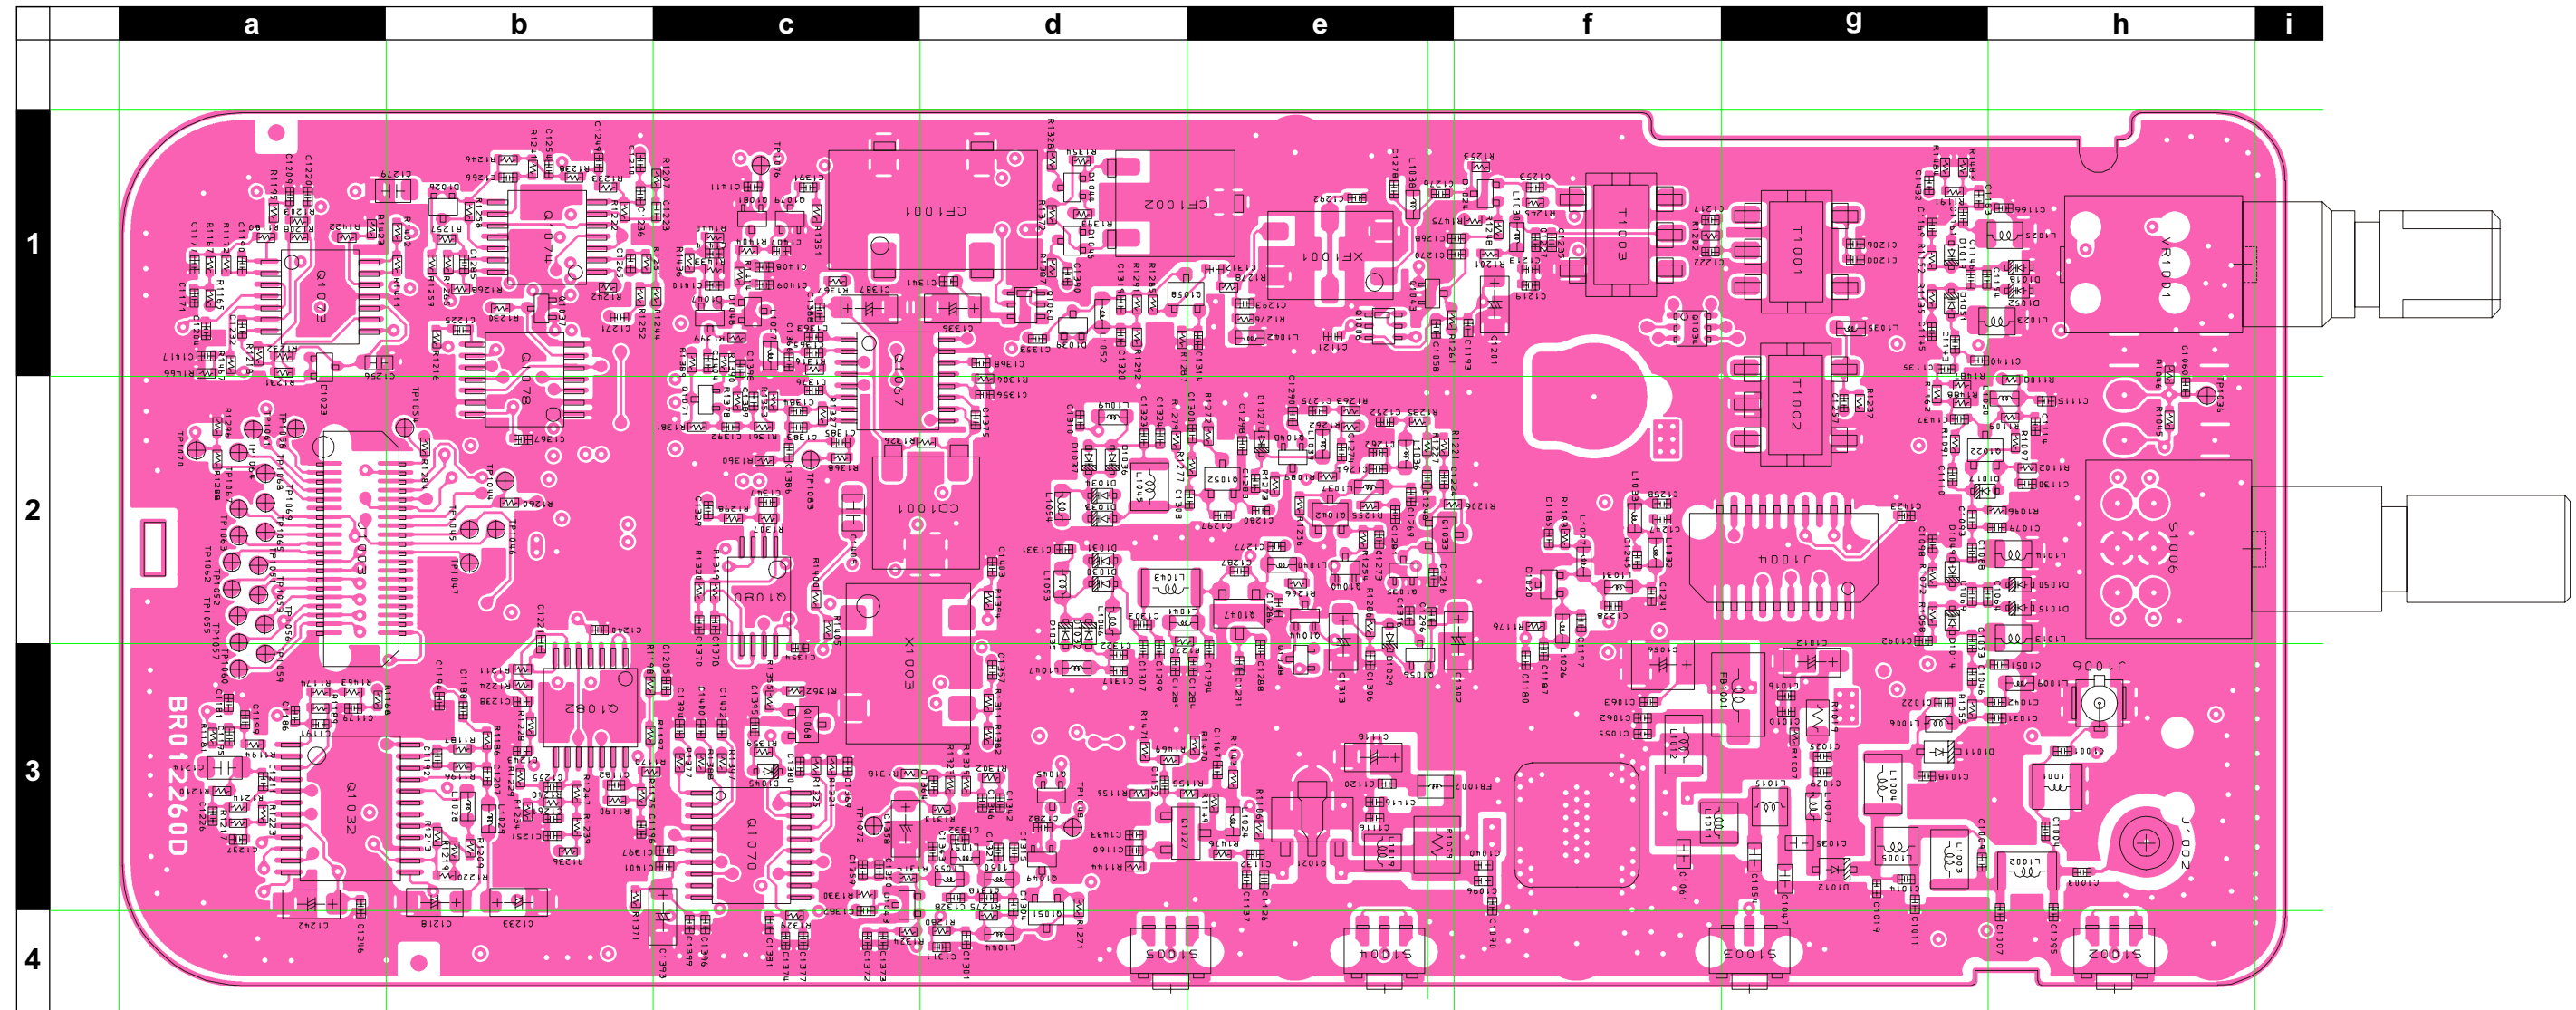

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
PCB with Components						CB2254001				
Printed Circuit Board					AC033N000	FR0122600	1-			
C 1001	CHIP CAP.	150pF	50V	CH	GRM1552C1H151JA01D	K22178240		1-	B	h3
C 1003	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	h3
C 1004	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	h3
C 1005	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	C2
C 1006	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	C1
C 1007	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	h3
C 1008	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B3
C 1009	CHIP CAP.	4pF	50V	CH	GRM1552C1H4R0CZ01D	K22178206		1-	B	g3
C 1010	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g3
C 1011	CHIP CAP.	27pF	50V	CH	GRM1552C1H270JZ01D	K22178222		1-	B	g3
C 1012	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	g3
C 1013	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	C1
C 1014	CHIP CAP.	9pF	50V	CH	GRM1552C1H9R0DZ01D	K22178211		1-	B	g3
C 1015	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	A	B2
C 1016	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	g3
C 1017	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	C1
C 1018	CHIP CAP.	27pF	50V	CH	GRM1552C1H270JZ01D	K22178222		1-	B	g3
C 1019	CHIP CAP.	27pF	50V	CH	GRM1552C1H270JZ01D	K22178222		1-	B	g3
C 1020	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	C1
C 1023	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	A	C1
C 1024	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D1
C 1025	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g3
C 1026	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	A2
C 1027	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B2
C 1028	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	A	C1
C 1030	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B3
C 1031	CHIP CAP.	22pF	50V	CH	GRM1552C1H220JZ01D	K22178220		1-	B	h3
C 1033	CHIP TA.CAP.	10uF	16V		TEMSVB21C106M-8R	K78120025		1-	A	B3
C 1034	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-	A	G2
C 1035	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	B	g3
C 1036	AL.ELECTRO.CAP.	100uF	10V		UVR1A101MDA6 100UF	K40109028		1-	A	C2
C 1037	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B3
C 1038	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	D1
C 1039	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B2
C 1041	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	G2
C 1042	CHIP CAP.	47pF	50V	CH	GRM1552C1H470JZ01D	K22178228		1-	B	h3
C 1043	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B2
C 1044	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B1
C 1045	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B1
C 1046	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g3
C 1047	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		1-	B	g3
C 1048	CHIP CAP.	5pF	50V	CH	GRM1552C1H5R0CZ01D	K22178207		1-	A	C1
C 1049	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	A2
C 1050	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B2
C 1051	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	h3
C 1052	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	A3
C 1053	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	B	g2
C 1054	CHIP CAP.	82pF	50V	CH	GRM1882C1H820JA01D	K22174233		1-	B	g3
C 1055	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	B	f3
C 1056	CHIP TA.CAP.	10uF	16V		TEMSVB21C106M-8R	K78120025		1-	B	f3
C 1057	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	G2
C 1059	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B3
C 1060	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	h2
C 1062	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f3
C 1063	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f3
C 1065	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B3
C 1066	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	A3
C 1067	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	C1

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1068	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	A3
C 1069	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	B	g2
C 1070	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	A	D1
C 1073	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	C1
C 1074	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B2
C 1075	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B2
C 1076	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B3
C 1077	CHIP TA.CAP.	4.7uF	20V		TEMSVA1D475M-8R	K78130048		1-	A	C2
C 1078	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D3
C 1079	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	h2
C 1080	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H1
C 1081	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B2
C 1082	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B3
C 1083	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	C2
C 1084	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D3
C 1085	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	C3
C 1086	CHIP CAP.	0.0018uF	50V	B	GRM36B182K50PT	K22178812		1-	A	H1
C 1087	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	D1
C 1088	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	B	g2
C 1089	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	B2
C 1091	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	H1
C 1092	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g2
C 1093	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g2
C 1094	CHIP CAP.	220pF	50V	B	GRM155B11H221KA01D	K22178801		1-	A	B3
C 1095	CHIP CAP.	6pF	50V	CH	GRM1552C1H6R0DZ01D	K22178208		1-	B	h3
C 1096	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	f3
C 1097	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B2
C 1098	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	g2
C 1099	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B3
C 1100	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	A3
C 1101	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	B2
C 1104	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H3
C 1107	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	H3
C 1109	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	E3
C 1110	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g2
C 1112	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H3
C 1113	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E3
C 1114	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	h2
C 1115	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	h2
C 1116	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e3
C 1117	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	E3
C 1118	CHIP TA.CAP.	1uF	16V		TMCSA1C105MTR	K78120023		1-	B	e3
C 1119	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H1
C 1120	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e3
C 1121	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e1
C 1122	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	B4
C 1123	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D3
C 1124	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D3
C 1127	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H1
C 1128	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	H1
C 1129	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	H2
C 1130	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	h2
C 1131	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	H1
C 1132	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	e3
C 1133	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D3
C 1134	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D3
C 1135	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	g1
C 1136	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	H1
C 1139	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	H2
C 1140	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	g1

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1141	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	B3
C 1142	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	I2
C 1143	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	g1
C 1144	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	H1
C 1145	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g1
C 1146	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	B	g1
C 1147	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D3
C 1148	CHIP CAP.	0.0018uF	50V	B	GRM36B182K50PT	K22178812		1-	A	G3
C 1150	CHIP TA.CAP.	1uF	16V		TMCSA1C105MTR	K78120023		1-	A	D3
C 1151	CHIP CAP.	0.047uF	10V	B	GRM36B473K10PT	K22108801		1-	A	G3
C 1152	CHIP CAP.	8pF	50V	CH	GRM1552C1H8R0DZ01D	K22178210		1-	B	d3
C 1153	CHIP CAP.	2pF	50V	CK	GRM1554C1H2R0CZ01D	K22178204		1-	A	E3
C 1155	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	C2
C 1156	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	G4
C 1158	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G3
C 1160	CHIP CAP.	220pF	50V	B	GRM155B11H221KA01D	K22178801		1-	B	d3
C 1161	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	B	g1
C 1162	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-	A	C2
C 1163	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-	A	C2
C 1164	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	H1
C 1165	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	F3
C 1166	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	h1
C 1167	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1	B	e3
C 1167	CHIP CAP.	220pF	50V	B	GRM155B11H221KA01D	K22178801		2-	B	e3
C 1168	CHIP CAP.	0.0033uF	50V	B	GRM155B11H332KA01D	K22178815		1-	A	G4
C 1169	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	g1
C 1171	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	a1
C 1172	CHIP TA.CAP.	10uF	6.3V		TESVSP0J106M-8R	K78080055		1-	A	F3
C 1174	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G4
C 1175	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E3
C 1176	CHIP CAP.	2pF	50V	CK	GRM1554C1H2R0CZ01D	K22178204		1-	A	E3
C 1177	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	a1
C 1180	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f3
C 1183	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	g1
C 1184	CHIP CAP.	0.22uF	10V	B	GRM155B31A224KE18D	K22108808		1-	A	G4
C 1185	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f2
C 1186	CHIP CAP.	0.0047uF	25V	B	GRM36B472K25PT	K22148830		1-	B	a3
C 1187	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	f3
C 1188	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	b3
C 1189	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	G4
C 1190	CHIP CAP.	330pF	50V	B	GRM155B11H331KA01D	K22178803		1-	B	a1
C 1191	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	a3
C 1192	CHIP CAP.	68pF	50V	CH	GRM1552C1H680JZ01D	K22178232		1-	B	b3
C 1193	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f1
C 1194	CHIP CAP.	0.0047uF	25V	B	GRM36B472K25PT	K22148830		1-	B	b3
C 1195	CHIP CAP.	0.0012uF	50V	B	GRM36B122K50PT	K22178810		1-	B	a3
C 1197	CHIP CAP.	47pF	50V	CH	GRM1552C1H470JZ01D	K22178228		1-	B	f2
C 1198	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	D2
C 1200	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	g1
C 1201	CHIP TA.CAP.	4.7uF	6.3V		TEMSVA0J475M-8R	K78080017		1-	B	f1
C 1203	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D2
C 1204	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	a1
C 1206	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g1
C 1207	CHIP CAP.	120pF	50V	CH	GRM1552C1H121JA01D	K22178238		1-	B	b3
C 1208	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D2
C 1209	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	a1
C 1210	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	b1
C 1211	CHIP CAP.	82pF	50V	CH	GRM1552C1H820JD01D	K22178234		1-	B	a3
C 1212	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D2
C 1213	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	f1

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1215	CHIP CAP.	150pF	50V	CH	GRM1552C1H151JA01D	K22178240		1-	A	H3
C 1216	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e2
C 1217	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f1
C 1218	CHIP TA.CAP.	1uF	16V		TMCSA1C105MTR	K78120023		1-	B	b3
C 1219	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f1
C 1220	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	B	a1
C 1222	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	f1
C 1223	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1224	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	e2
C 1225	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	b1
C 1226	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	a3
C 1227	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	f1
C 1228	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	f2
C 1229	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D2
C 1230	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	D2
C 1231	CHIP CAP.	0.0022uF	50V	B	GRM155B11H222KA01D	K22178813		1-	A	H3
C 1232	CHIP CAP.	330pF	50V	B	GRM155B11H331KA01D	K22178803		1-	B	a1
C 1233	CHIP TA.CAP.	1uF	16V		TMCSA1C105MTR	K78120023		1-	B	b3
C 1234	CHIP CAP.	0.0047uF	25V	B	GRM36B472K25PT	K22148830		1-	A	H3
C 1235	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	f1
C 1236	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	b1
C 1237	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	a3
C 1239	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	A	D2
C 1240	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	b2
C 1241	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	f2
C 1242	CHIP TA.CAP.	4.7uF	6.3V		TMCMA0J475MTR	K78080026		1-	B	a3
C 1244	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	A	H3
C 1246	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	a3
C 1247	CHIP CAP.	18pF	50V	CH	GRM1552C1H180JZ01D	K22178218		1-	B	f2
C 1248	CHIP CAP.	3pF	50V	CJ	GRP1553C1H3R0CZ01E	K22178205		1-	B	e2
C 1249	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	b1
C 1250	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	A	H2
C 1252	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	B	e2
C 1253	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	f1
C 1254	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	b1
C 1256	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		1-	B	a1
C 1257	CHIP CAP.	47pF	50V	CH	GRM1552C1H470JZ01D	K22178228		1-	B	g2
C 1258	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	f2
C 1259	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G2
C 1260	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	A	H2
C 1262	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	e2
C 1264	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1265	CHIP CAP.	680pF	50V	B	GRM155B11H681KA01D	K22178807		1-	B	b1
C 1266	CHIP CAP.	180pF	25V	CH	GRM36CH181J25PT	K22148201		1-	B	b1
C 1267	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	A	H2
C 1268	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e1
C 1269	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1270	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e1
C 1271	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	b1
C 1273	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e2
C 1274	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e2
C 1276	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	e1
C 1277	CHIP CAP.	0.5pF	50V	CK	GRM1554C1HR50BZ01D	K22178285		1-	B	e2
C 1280	CHIP CAP.	1pF	50V	CK	GRM1554C1H1R0BZ01D	K22178287		1-	B	e2
C 1281	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e2
C 1282	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d3
C 1283	CHIP CAP.	1.5pF	50V	CK	GRM1554C1H1R5BZ01D	K22178288		1-	B	e2
C 1284	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e3
C 1286	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	B	e2
C 1287	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	B	e2

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1288	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e3
C 1289	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	d3
C 1290	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1291	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e3
C 1292	CHIP CAP.	10pF	50V	CH	GRM1552C1H100JZ01D	K22178212		1-	B	e1
C 1294	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	e3
C 1295	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	A1
C 1296	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1297	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	e2
C 1298	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	e2
C 1299	CHIP CAP.	7pF	50V	CH	GRM1552C1H7R0DZ01D	K22178209		1-	B	d3
C 1300	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1301	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	d4
C 1302	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	f2
C 1303	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	d2
C 1304	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	d3
C 1305	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	A1
C 1306	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e3
C 1308	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	d2
C 1311	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	d4
C 1312	CHIP CAP.	27pF	50V	CH	GRM1552C1H270JZ01D	K22178222		1-	B	e1
C 1313	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	e2
C 1314	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e1
C 1315	CHIP CAP.	12pF	50V	CH	GRM1552C1H120JZ01D	K22178214		1-	B	d3
C 1316	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e2
C 1317	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 1318	CHIP CAP.	4pF	50V	CH	GRM1552C1H4R0CZ01D	K22178206		1-	B	d3
C 1320	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d1
C 1321	CHIP CAP.	27pF	50V	CH	GRM1552C1H270JZ01D	K22178222		1-	B	d3
C 1322	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d3
C 1323	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d2
C 1324	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d2
C 1325	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	A	F3
C 1326	CHIP CAP.	15pF	50V	CH	GRM1552C1H150JZ01D	K22178216		1-	A	G3
C 1327	CHIP TA.CAP.	4.7uF	16V		TEMSVA1C475M-8R	K78120031		1-	A	G2
C 1328	CHIP CAP.	5pF	50V	CH	GRM1552C1H5R0CZ01D	K22178207		1-	B	d3
C 1329	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c2
C 1330	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	G2
C 1331	CHIP CAP.	0.033uF	10V	B	GRM36B333K10PT	K22108803		1-	B	d2
C 1332	CHIP CAP.	22pF	50V	CH	GRM1552C1H220JZ01D	K22178220		1-	B	d3
C 1333	CHIP TA.CAP.	4.7uF	16V		TEMSVA1C475M-8R	K78120031		1-	A	E1
C 1334	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	F2
C 1335	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	G2
C 1336	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	d1
C 1337	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E1
C 1338	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G2
C 1339	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	E1
C 1340	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	E2
C 1341	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	d1
C 1343	CHIP CAP.	8pF	50V	CH	GRM1552C1H8R0DZ01D	K22178210		1-	B	d3
C 1344	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E1
C 1345	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	G2
C 1346	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	B	d3
C 1347	CHIP CAP.	180pF	25V	CH	GRM36CH181J25PT	K22148201		1-	B	c2
C 1348	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	F2
C 1349	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E2
C 1350	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c3
C 1351	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	E1
C 1352	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	G2
C 1353	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d1

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1354	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c3
C 1355	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	F2
C 1356	CHIP CAP.	0.047uF	10V	B	GRM36B473K10PT	K22108801		1-	B	d2
C 1357	CHIP CAP.	22pF	50V	CH	GRM1552C1H220JZ01D	K22178220		1-	B	d3
C 1358	CHIP TA.CAP.	0.68uF	35V		TEMSVA1V684M-8R	K78160030		1-	B	c3
C 1359	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c3
C 1360	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-	A	E1
C 1361	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-	A	G2
C 1362	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	E2
C 1364	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d3
C 1365	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1366	CHIP CAP.	82pF	50V	CH	GRM1552C1H820JD01D	K22178234		1-	B	c1
C 1367	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	b2
C 1368	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d1
C 1369	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c3
C 1370	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c2
C 1371	CHIP TA.CAP.	4.7uF	6.3V		TESVSP0J475M-8R	K78080053		1-	A	E1
C 1372	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c4
C 1373	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c4
C 1374	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c4
C 1375	CHIP CAP.	82pF	50V	CH	GRM1552C1H820JD01D	K22178234		1-	B	d2
C 1376	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c2
C 1377	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c4
C 1379	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	A	E1
C 1380	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c3
C 1381	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c4
C 1382	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c3
C 1383	CHIP CAP.	220pF	50V	B	GRM155B11H221KA01D	K22178801		1-	B	c2
C 1384	CHIP CAP.	270pF	50V	B	GRM155B11B271KD01D	K22178802		1-	B	c2
C 1385	CHIP CAP.	150pF	50V	CH	GRM1552C1H151JA01D	K22178240		1-	B	c2
C 1387	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	c1
C 1388	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1390	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d1
C 1391	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c1
C 1392	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c2
C 1393	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	c4
C 1394	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	c3
C 1395	CHIP CAP.	0.047uF	10V	B	GRM36B473K10PT	K22108801		1-	B	c3
C 1396	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	c4
C 1397	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c3
C 1399	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c4
C 1400	CHIP CAP.	33pF	50V	CH	GRM1552C1H330JZ01D	K22178224		1-	B	c3
C 1401	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c3
C 1402	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	c3
C 1403	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	d2
C 1404	CHIP CAP.	0.047uF	10V	B	GRM36B473K10PT	K22108801		1-	B	c1
C 1405	CHIP CAP.	10uF	6.3V	B	JMK212BJ106KG-T	K22080802		1-	B	c2
C 1406	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	F1
C 1407	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	c1
C 1408	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1409	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1410	CHIP CAP.	560pF	50V	B	GRM36B561K50PT	K22178806		1-	B	c1
C 1412	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	F1
C 1413	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G1
C 1414	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	c1
C 1415	CHIP CAP.	10uF	6.3V	B	JMK212BJ106KG-T	K22080802		1-	A	F3
C 1416	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	B	e3
C 1417	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	a1
C 1418	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	A	G1
C 1423	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g2

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 1428	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	G2
C 1429	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	A	D1
C 1430	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	A	D1
C 1432	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g1
C 1434	CHIP CAP.	0.022uF	16V	B	GRM36B223K16PT	K22128806		1-	A	C1
C 1437	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	g2
C 1438	CHIP CAP.	0.01uF	25V	B	GRM39B103M25PT	K22144802		1-		
C 1439	CHIP CAP.	1uF	6.3V	B	GRM188B10J105KA01D	K22084801		1-		
C 1440	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		2-		
CD1001	CERAMIC DISC				ECDA450C24	H7901460		1-	B	d2
CF1001	CERAMIC FILTER				ELFY450E	H3900549		1-	B	d1
CF1002	CERAMIC FILTER				ELFC450G	H3900538		1-	B	d1
D 1001	DIODE				PTZ TE25 15A	G2070692		1-	A	C1
D 1002	DIODE				1SS400 TE61	G2070634		1-	A	A3
D 1003	DIODE				1SS400 TE61	G2070634		1-	A	A4
D 1004	DIODE				1SS400 TE61	G2070634		1-	A	D4
D 1005	DIODE				1SS400 TE61	G2070634		1-	A	E4
D 1006	DIODE				DA221 TL	G2070178		1-	A	B1
D 1007	DIODE				DA221 TL	G2070178		1-	A	B2
D 1008	DIODE				DA221 TL	G2070178		1-	A	B2
D 1009	DIODE				DA221 TL	G2070178		1-	A	B2
D 1010	DIODE				DA221 TL	G2070178		1-	A	B2
D 1011	DIODE				HVU131TRF	G2070462		1-	B	g3
D 1012	DIODE				HVU131TRF	G2070462		1-	B	g3
D 1013	DIODE				DA221 TL	G2070178		1-	A	B2
D 1014	DIODE				1SV323(TPH3)	G2071006		1-	B	g2
D 1015	DIODE				1SV323(TPH3)	G2071006		1-	B	h2
D 1016	DIODE				1SS400 TE61	G2070634		1-	A	B3
D 1017	DIODE				1SS400 TE61	G2070634		1-	B	g2
D 1018	DIODE				1SV323(TPH3)	G2071006		1-	B	h1
D 1019	DIODE				1SV323(TPH3)	G2071006		1-	B	g1
D 1020	DIODE				DAN222 TL	G2070174		1-	B	f2
D 1021	DIODE				1SS400 TE61	G2070634		1-	A	D2
D 1022	DIODE				DA221 TL	G2070178		1-	A	D2
D 1023	DIODE				DA221 TL	G2070178		1-	B	a1
D 1024	DIODE				DAN235E TL	G2070612		1-	B	f1
D 1027	DIODE				1SV286(TPL3)	G2070610		1-	B	e2
D 1028	LED				SDDF01000A1	G2071056		1-	A	A1
D 1029	DIODE				1SS400 TE61	G2070634		1-	B	e2
D 1030	DIODE				1SV282(TPH3)	G2070778		1-	B	d2
D 1031	DIODE				1SV282(TPH3)	G2070778		1-	B	d2
D 1032	DIODE				1SV282(TPH3)	G2070778		1-	B	d2
D 1033	DIODE				1SV286(TPL3)	G2070610		1-	B	d2
D 1034	DIODE				1SV286(TPL3)	G2070610		1-	B	d2
D 1035	DIODE				1SV282(TPH3)	G2070778		1-	B	d2
D 1036	DIODE				1SV286(TPL3)	G2070610		1-	B	d2
D 1037	DIODE				1SV286(TPL3)	G2070610		1-	B	d2
D 1038	DIODE				1SS400 TE61	G2070634		1-	A	E1
D 1039	DIODE				DA221 TL	G2070178		1-	B	d1
D 1040	DIODE				DA221 TL	G2070178		1-	A	E2
D 1041	DIODE				HZU5ALL-TR	G2070754		1-	A	E1
D 1042	DIODE				1SS400 TE61	G2070634		1-	A	F2
D 1043	DIODE				DAN235E TL	G2070612		1-	B	c3
D 1044	DIODE				DAN222 TL	G2070174		1-	B	d1
D 1045	DIODE				1SS400 TE61	G2070634		1-	B	c3
D 1046	DIODE				DAN222 TL	G2070174		1-	B	d1
D 1047	DIODE				DA221 TL	G2070178		1-	B	c1
D 1048	DIODE				DA221 TL	G2070178		1-	B	c1
D 1049	DIODE				1SV323(TPH3)	G2071006		1-	B	g2
D 1050	DIODE				1SV323(TPH3)	G2071006		1-	B	h2

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
D 1051	DIODE				1SV323(TPH3)	G2071006		1-	B	g1
D 1052	DIODE				1SV323(TPH3)	G2071006		1-	B	h1
F 1001	CHIP FUSE	3A			0434 003. 3.0A	Q0000107		1-	A	C2
FB1001	FERRITE BEADS				SMB304729	L9190094		1-	B	g3
FB1002	FERRITE BEADS				BLM21A121SPT	L9190108		1-	B	e3
HS1001	HEATSINK PLATE					RA0697800		1-	B	f3
J 1001	CONNECTOR				9639S-24B-Y905	P1091222		1-	A	B1
J 1002	SPRING CONNECTOR					R0152490		1-	B	h3
J 1003	CONNECTOR				AXK6S40535P	P0091209		1-	B	a2
J 1004	CONNECTOR				AXN320C130P	P1090924		1-	B	g2
J 1005	CONNECTOR				9637S-08A-Y905	P1091221		1-	A	G1
J 1006	CONNECTOR				U.FL-R-SMT(10)	P1091155		1-	B	h3
L 1001	COIL	0.014uH			AS050425-14NJ	L0022827		1-	B	h3
L 1002	COIL	0.047uH			AS030821-47NJ	L0022824		1-	B	h3
L 1003	COIL	0.047uH			AS030821-47NJ	L0022824		1-	B	g3
L 1004	COIL	0.047uH			AS030821-47NK	L0022588		1-	B	g3
L 1005	COIL	0.033uH			AS030621-33NJ	L0022822		1-	B	g3
L 1006	M.RFC	0.047uH		2%	C1608CB-47NG	L1691040		1-	B	g3
L 1007	M.RFC	0.39uH		2%	C1608CB-R39G	L1691107		1-	B	g3
L 1008	M.RFC	2.7uH			LK1608 2R7K-T	L1690848		1-	A	B3
L 1009	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	h3
L 1010	M.RFC	2.7uH			LK1608 2R7K-T	L1690848		1-	A	B3
L 1011	COIL	0.0054uH			AS050321-5R4NJ	L0022581		1-	B	f3
L 1012	COIL	0.047uH			AS030821-47NK	L0022588		1-	B	f3
L 1013	CHIP COIL	0.068uH			LQW2BHN68NJ03L	L1690605		1-	B	h2
L 1014	CHIP COIL	0.068uH			LQW2BHN68NJ03L	L1690605		1-	B	h2
L 1015	COIL	0.025uH			AS030521-25NJ	L0022821		1-	B	g3
L 1019	COIL	0.025uH			AS030521-25NJ	L0022821		1-	B	e3
L 1020	M.RFC	6.8uH			LK1608 6R8K-T	L1690632		1-	B	h2
L 1023	CHIP COIL	0.068uH			LQW2BHN68NJ03L	L1690605		1-	B	h1
L 1024	M.RFC	0.056uH			HK1608 56NJ-T	L1690525		1-	B	e3
L 1025	CHIP COIL	0.068uH			LQW2BHN68NJ03L	L1690605		1-	B	h1
L 1026	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	f2
L 1027	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	f2
L 1028	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	b3
L 1029	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	b3
L 1030	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	f1
L 1031	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	B	f2
L 1032	M.RFC	0.056uH			HK1608 56NJ-T	L1690525		1-	B	f2
L 1033	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	B	f2
L 1034	M.RFC	100uH			FLC32T-101J	L1690227		1-	A	H3
L 1035	M.RFC	0.056uH			HK1608 56NJ-T	L1690525		1-	B	g1
L 1036	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	B	e2
L 1037	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	e2
L 1038	M.RFC	0.56uH			LK1608 R56K-T	L1690415		1-	B	e1
L 1039	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	e2
L 1040	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	e2
L 1041	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	d2
L 1043	COIL	0.051uH			ASF030821-51R0NJ	L0022878		1-	B	d2
L 1044	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	d4
L 1045	COIL	0.0418uH			ASF030721-41R8NJ	L0022877		1-	B	d2
L 1046	M.RFC	0.39uH		2%	C1608CB-R39G	L1691107		1-	B	d2
L 1047	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	d3
L 1049	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	B	d2
L 1050	M.RFC	0.039uH			HK1608 39NJ-T	L1690523		1-	B	d3
L 1051	M.RFC	0.039uH			HK1608 39NJ-T	L1690523		1-	B	d3
L 1052	M.RFC	1uH			LK1608 1R0K-T	L1690687		1-	B	d1
L 1053	M.RFC	0.39uH		2%	C1608CB-R39G	L1691107		1-	B	d2
L 1054	M.RFC	0.39uH		2%	C1608CB-R39G	L1691107		1-	B	d2
L 1055	M.RFC	0.039uH			HK1608 39NJ-T	L1690523		1-	B	d3

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
L 1056	M.RFC	33uH			FLC32T-330J	L1690221		1-	A	F3
L 1057	M.RFC	0.15uH			HK1608 R15J-T	L1690938		1-	B	c1
Q 1001	IC				CD4053BPWR	G1093864		1-	A	C1
Q 1001	IC				NJU4053BV-TE1	G1092927		3-	A	C1
Q 1002	TRANSISTOR				XP1501-(TX)	G3070143		1-	A	A3
Q 1003	TRANSISTOR				2SB1132 T100 R	G3211327R		1-	A	A3
Q 1004	TRANSISTOR				DTC144EE TL	G3070075		1-	A	A3
Q 1005	IC				TAR5S50U	G1094097		1-	A	B3
Q 1006	TRANSISTOR				UMD5NTR	G3070343		1-	B	e1
Q 1007	FET				RTQ030P02	G4070015		1-	A	C2
Q 1008	IC				TDA2822D013TR	G1091542		1-	A	A2
Q 1009	TRANSISTOR				DTC114TE TL	G3070225		1-	A	B4
Q 1010	FET				2SK3476(TE12L)	G3834768		1-	A	C3
Q 1011	TRANSISTOR				UMD12N TR	G3070342		1-	A	B2
Q 1012	TRANSISTOR				2SA1774 TL R	G3117748R		1-	A	C2
Q 1013	TRANSISTOR				DTC114TE TL	G3070225		1-	A	B2
Q 1014	TRANSISTOR				UMD12NTR	G3070342		1-	A	B2
Q 1015	IC				TDA2822D013TR	G1091542		1-	A	B2
Q 1016	IC				CD4053BPWR	G1093864		1-	A	H1
Q 1016	IC				NJU4053BV-TE1	G1092927		3-	A	H1
Q 1017	TRANSISTOR				DTC144EE TL	G3070075		1-	A	C3
Q 1018	TRANSISTOR				DTC144EE TL	G3070075		1-	A	C2
Q 1019	TRANSISTOR				DTC144EE TL	G3070075		1-	A	A4
Q 1020	IC				M62364FP 600D	G1093033		1-	A	E3
Q 1021	FET				2SK3475(T2LVX)	G3070318		1-	B	e3
Q 1022	TRANSISTOR				2SC5226-4/5-TL	G3352268Z		1-	B	g2
Q 1023	IC				LA8630M-B-TE-R	G1093452		1-	A	H2
Q 1024	TRANSISTOR				DTC144EE TL	G3070075		1-	A	D3
Q 1025	IC				CD4052BPWR	G1093862		1-	A	H2
Q 1026	TRANSISTOR				UNR911FJ0L	G3070349		1-	A	H1
Q 1027	TRANSISTOR				2SC3356-T2B R25	G3333567E		1-	B	d3
Q 1028	IC				BD6111FV-E2	G1093746		1-	A	C2
Q 1029	IC				CD4052BPWR	G1093862		1-	A	G3
Q 1030	IC				NJU4053BV-TE1	G1092927		1-	A	F3
Q 1031	IC				NJM2130F-TE1	G1093074		1-	A	D2
Q 1032	IC				AK2345(TAPE)	G1093184		1-	B	a3
Q 1033	TRANSISTOR				2SC5226-4-TL	G3352268D		1-	B	e2
Q 1034	IC				SPM5001	G1093686		1-	B	f1
Q 1035	TRANSISTOR				DTC144EE TL	G3070075		1-	B	e2
Q 1036	TRANSISTOR				2SA1774 TL R	G3117748R		1-	A	D2
Q 1037	TRANSISTOR				DTC144EE TL	G3070075		1-	B	b1
Q 1038	TRANSISTOR				DTA144EE TL	G3070074		1-	B	e3
Q 1039	TRANSISTOR				DTC114TE TL	G3070225		1-	A	H3
Q 1040	TRANSISTOR				DTC114TE TL	G3070225		1-	B	e2
Q 1041	IC				BU8872FS-E2	G1093656		1-	A	H2
Q 1042	TRANSISTOR				2SC5226-4-TL	G3352268D		1-	B	e2
Q 1043	TRANSISTOR				DTC144EE TL	G3070075		1-	B	e1
Q 1044	TRANSISTOR				DTC144EE TL	G3070075		1-	B	e2
Q 1045	TRANSISTOR				UNR911FJ0L	G3070349		1-	B	d3
Q 1046	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A3
Q 1047	FET				2SK508-T2B K52	G3805087B		1-	B	e2
Q 1048	TRANSISTOR				DTC114TE TL	G3070225		1-	B	e2
Q 1049	TRANSISTOR				DTC144EE TL	G3070075		1-	B	d3
Q 1050	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A3
Q 1051	TRANSISTOR				2SC5226-4-TL	G3352268D		1-	B	d3
Q 1052	TRANSISTOR				2SC4227-T2 R32	G3342277B		1-	B	e2
Q 1052	TRANSISTOR				2SC4227-T1 R32	G3342278B		3-	B	e2
Q 1053	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A2
Q 1054	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A2
Q 1055	TRANSISTOR				2SD1767 T100 Q	G3417677Q		1-	A	A1

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
Q 1056	TRANSISTOR				2SC4617 TL R	G3346178R		1-	B	e3
Q 1057	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A2
Q 1058	TRANSISTOR				2SC5226-4-TL	G3352268D		1-	B	d1
Q 1059	TRANSISTOR				DTC114TE TL	G3070225		1-	A	A2
Q 1060	TRANSISTOR				UMD5NTR	G3070343		1-	B	d1
Q 1061	IC				S-80835CNMC-B8U-T2	G1093606		1-	A	E2
Q 1062	IC				TAR5S35U	G1094096		1-	A	G2
Q 1063	IC				TAR5S35U	G1094096		1-	A	E1
Q 1064	TRANSISTOR				DTC114TE TL	G3070225		1-	A	F3
Q 1065	IC				BR93L66RFVM-WTR	G1093874		1-	A	G2
Q 1066	TRANSISTOR				2SC4617 TL R	G3346178R		1-	A	E2
Q 1067	IC				TA31136FN(EL)	G1091605		1-	B	c2
Q 1068	FET				2SK880GR TE85R	G3808807G		1-	B	c3
Q 1069	IC				LC87F5BP6A-F54P8-E	✖		1-	A	F1
Q 1070	IC				SA7025DK	G1093014		1-	B	c3
Q 1071	TRANSISTOR				2SC4617 TL R	G3346178R		1-	B	c2
Q 1072	IC				NJM12902V-TE1	G1093592		1-	A	B3
Q 1073	IC				LM2902PWR	G1094009		1-	B	a1
Q 1074	IC				LM2902PWR	G1094009		1-	B	b1
Q 1075	IC				LM2902PWR	G1094009		1-	A	F3
Q 1076	IC				LM2904PWR	G1094010		1-	A	C1
Q 1077	IC				LM2902PWR	G1094009		1-	A	H3
Q 1078	IC				CD4066BPWR	G1093865		1-	B	b2
Q 1078	IC				NJU4066BV-TE1	G1091873		3-	B	b2
Q 1079	TRANSISTOR				DTC144EE TL	G3070075		1-	B	c1
Q 1080	IC				LM2904PWR	G1094010		1-	B	c2
Q 1081	TRANSISTOR				DTC144EE TL	G3070075		1-	B	c1
Q 1083	IC				LM2902PWR	G1094009		1-	A	G3
Q 1084	TRANSISTOR				DTC144EE TL	G3070075		1-	A	B3
Q 1085	IC				TC7S08FU TE85R	G1091528		1-	A	H1
Q 1086	TRANSISTOR				UMD5NTR	G3070343		1-	A	H1
Q 1087	TRANSISTOR				DTC144EE TL	G3070075		1-	A	E1
Q 1088	FET				RTM002P02(TAPE)	G3070347		1-	A	B3
R 1001	CHIP RES.	18k	1/16W	5%	RMC1/16S 183JTH	J24189040		1-	A	C1
R 1002	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	C1
R 1003	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	C1
R 1004	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	C1
R 1005	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B1
R 1006	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	B4
R 1007	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	B	g3
R 1008	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B1
R 1009	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B1
R 1010	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	C1
R 1011	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	A	B2
R 1012	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	A3
R 1013	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	A3
R 1014	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	A	C1
R 1015	CHIP RES.	4.7	1/16W	5%	RMC1/16S 4R7JTH	J24189066		1-	A	A2
R 1016	CHIP RES.	4.7	1/16W	5%	RMC1/16S 4R7JTH	J24189066		1-	A	B2
R 1018	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	A	B1
R 1019	CHIP RES.	150	1/10W	5%	RMC1/10T 151J	J24205151		1-	B	g3
R 1020	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	A	C1
R 1021	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B2
R 1022	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	C1
R 1023	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	C1
R 1024	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	A3
R 1025	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B2
R 1026	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B2
R 1027	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	C1
R 1028	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	B1

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1029	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	B2
R 1030	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	B2
R 1031	CHIP RES.	0.33	1/8W	10%	RMC1/8 R33KTP	J24219001		1-	A	B3
R 1032	CHIP RES.	0.33	1/8W	10%	RMC1/8 R33KTP	J24219001		1-	A	B3
R 1033	CHIP RES.	0.33	1/8W	10%	RMC1/8 R33KTP	J24219001		1-	A	B3
R 1034	CHIP RES.	8.2k	1/16W	5%	RMC1/16S 822JTH	J24189036		1-	A	B1
R 1035	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	B2
R 1036	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	C1
R 1037	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	B1
R 1038	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	A	G2
R 1039	CHIP RES.	1.5M	1/16W	5%	RMC1/16S 155JTH	J24189063		1-	A	C1
R 1040	CHIP RES.	220k	1/16W	0.5%	MCR01MZPD2203	J24189389		1-	A	B3
R 1041	CHIP RES.	220k	1/16W	0.5%	MCR01MZPD2203	J24189389		1-	A	B3
R 1042	CHIP RES.	68k	1/16W	5%	RMC1/16S 683JTH	J24189047		1-	A	G2
R 1043	CHIP RES.	220k	1/16W	0.5%	MCR01MZPD2203	J24189389		1-	A	B3
R 1044	CHIP RES.	220k	1/16W	0.5%	MCR01MZPD2203	J24189389		1-	A	B3
R 1045	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	h2
R 1046	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	h1
R 1047	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	C1
R 1048	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	D1
R 1049	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	C1
R 1050	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B2
R 1052	CHIP RES.	270k	1/16W	0.5%	MCR01MZPD2703	J24189329		1-	A	B3
R 1053	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B2
R 1055	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	g3
R 1056	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	B3
R 1057	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	A3
R 1058	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	g2
R 1059	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	A	D1
R 1060	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	C2
R 1061	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1	A	D3
R 1061	CHIP RES.	27k	1/16W	5%	RMC1/16S 273JTH	J24189042		2-	A	D3
R 1062	CHIP RES.	4.7	1/16W	5%	RMC1/16S 4R7JTH	J24189066		1-	A	B2
R 1064	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	H1
R 1065	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	D1
R 1066	CHIP RES.	2.7	1/10W	5%	RMC1/10T 2R7J	J24205279		1-	A	C2
R 1067	CHIP RES.	2.7	1/10W	5%	RMC1/10T 2R7J	J24205279		1-	A	C2
R 1068	CHIP RES.	18k	1/16W	5%	RMC1/16S 183JTH	J24189040		1-	A	H1
R 1069	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	A	C3
R 1070	CHIP RES.	150	1/16W	5%	RMC1/16S 151JTH	J24189015		1-	A	D3
R 1071	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B2
R 1072	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	g2
R 1073	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B2
R 1074	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	B3
R 1075	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	B3
R 1076	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	D3
R 1077	CHIP RES.	270k	1/16W	0.5%	MCR01MZPD2703	J24189329		1-	A	B3
R 1078	CHIP RES.	4.7	1/16W	5%	RMC1/16S 4R7JTH	J24189066		1-	A	B2
R 1080	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	B2
R 1081	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	A3
R 1083	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	B3
R 1084	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	H3
R 1085	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	B3
R 1086	CHIP RES.	39k	1/16W	5%	RMC1/16S 393JTH	J24189044		1-	A	H3
R 1087	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	C2
R 1089	CHIP RES.	15k	1/16W	5%	RMC1/16S 153JTH	J24189039		1-	B	e2
R 1090	CHIP RES.	120k	1/16W	5%	RMC1/16S 124JTH	J24189050		1-	A	H3
R 1091	CHIP RES.	820	1/16W	5%	RMC1/16S 821JTH	J24189024		1-	B	g2
R 1093	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	B3
R 1094	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	B3

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1095	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	H3
R 1097	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	B	h2
R 1098	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	B4
R 1099	CHIP RES.	180k	1/16W	5%	RMC1/16S 184JTH	J24189052		1-	A	B4
R 1100	CHIP RES.	390	1/16W	5%	RMC1/16S 391JTH	J24189020		1-	A	D3
R 1101	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	D3
R 1102	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	h2
R 1103	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	A	B4
R 1104	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	A	G2
R 1105	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	B4
R 1106	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	e3
R 1107	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1	A	D3
R 1107	CHIP RES.	8.2k	1/16W	5%	RMC1/16S 822JTH	J24189036		2-	A	D3
R 1108	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	h2
R 1110	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	B4
R 1111	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	G3
R 1113	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	G3
R 1114	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	A	B4
R 1115	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	H2
R 1117	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	H1
R 1120	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	A	G3
R 1121	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	A	G3
R 1122	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	A	G2
R 1123	CHIP RES.	3.9k	1/16W	5%	RMC1/16S 392JTH	J24189032		1	A	D3
R 1123	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		2-	A	D3
R 1124	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B3
R 1125	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	G3
R 1126	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	G3
R 1127	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	G3
R 1128	CHIP RES.	47	1/16W	5%	RMC1/16S 470JTH	J24189009		1-	A	H1
R 1129	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	G3
R 1130	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	A	B3
R 1131	CHIP RES.	680	1/16W	5%	RMC1/16S 681JTH	J24189023		1-	A	G3
R 1132	CHIP RES.	8.2k	1/16W	5%	RMC1/16S 822JTH	J24189036		1-	A	G3
R 1133	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	G3
R 1134	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	G3
R 1135	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	g1
R 1136	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	B3
R 1137	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	D3
R 1138	CHIP RES.	1.2M	1/16W	5%	RMC1/16S 125JTH	J24189062		1-	A	E3
R 1139	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	B3
R 1140	CHIP RES.	1.2k	1/16W	5%	RMC1/16S 122JTH	J24189026		1-	A	G3
R 1141	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1-	A	G3
R 1142	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1-	A	G3
R 1143	CHIP RES.	47	1/16W	5%	RMC1/16S 470JTH	J24189009		1-	B	e3
R 1144	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	B	d3
R 1145	CHIP RES.	560	1/16W	5%	RMC1/16S 561JTH	J24189022		1-	A	G3
R 1146	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	A	G3
R 1147	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	A	H3
R 1148	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	B3
R 1150	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	F3
R 1151	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	F3
R 1152	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	g1
R 1153	CHIP RES.	820k	1/16W	5%	RMC1/16S 824JTH	J24189060		1-	A	E3
R 1154	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	B3
R 1155	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	d3
R 1156	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	d3
R 1157	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	E3
R 1158	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	E3
R 1159	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	G3

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1160	CHIP RES.	560	1/16W	5%	RMC1/16S 561JTH	J24189022		1-	A	G4
R 1163	CHIP RES.	680k	1/16W	5%	RMC1/16S 684JTH	J24189059		1-	A	E3
R 1164	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	B3
R 1165	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	a1
R 1166	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	C2
R 1167	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	a1
R 1168	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	a3
R 1169	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	F3
R 1171	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	A	E2
R 1172	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	a1
R 1173	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	H4
R 1174	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	a3
R 1176	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	B	f2
R 1177	CHIP RES.	82k	1/16W	5%	RMC1/16S 823JTH	J24189048		1-	A	D1
R 1178	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	D2
R 1179	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	D2
R 1180	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	B	a1
R 1181	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	a3
R 1182	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	H3
R 1183	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	f2
R 1184	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	H4
R 1185	CHIP RES.	820	1/16W	5%	RMC1/16S 821JTH	J24189024		1-	A	G4
R 1186	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	b3
R 1187	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	b3
R 1188	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	G3
R 1189	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	B	a3
R 1191	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	g1
R 1193	CHIP RES.	270k	1/16W	5%	RMC1/16S 274JTH	J24189054		1-	A	D2
R 1194	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	B	a3
R 1195	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	B	a1
R 1196	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	b3
R 1199	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	G3
R 1200	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	G3
R 1201	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	f1
R 1202	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	f1
R 1203	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	a1
R 1204	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	H3
R 1205	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	D2
R 1206	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	B	e2
R 1207	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	c1
R 1208	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	a1
R 1209	CHIP RES.	3.9k	1/16W	5%	RMC1/16S 392JTH	J24189032		1-	B	b3
R 1210	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	a3
R 1212	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	H3
R 1213	CHIP RES.	150k	1/16W	5%	RMC1/16S 154JTH	J24189051		1-	B	b3
R 1214	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	a3
R 1215	CHIP RES.	120k	1/16W	5%	RMC1/16S 124JTH	J24189050		1-	A	H3
R 1216	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	b1
R 1217	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	a3
R 1218	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1	B	a1
R 1218	CHIP RES.	2.2M	1/16W	5%	RMC1/16S 225JTH	J24189065		2-	B	a1
R 1219	CHIP RES.	39k	1/16W	5%	RMC1/16S 393JTH	J24189044		1	B	b3
R 1219	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		2-	B	b3
R 1220	CHIP RES.	15k	1/16W	5%	RMC1/16S 153JTH	J24189039		1-	B	b3
R 1221	CHIP RES.	18	1/16W	5%	RMC1/16S 180JTH	J24189004		1-	B	e2
R 1222	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	B	b1
R 1223	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	a3
R 1225	CHIP RES.	15k	1/16W	5%	RMC1/16S 153JTH	J24189039		1-	A	H3
R 1226	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	G2
R 1227	CHIP RES.	18	1/16W	5%	RMC1/16S 180JTH	J24189004		1-	B	e2

Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1230	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	b1
R 1231	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	a1
R 1232	CHIP RES.	680k	1/16W	5%	RMC1/16S 684JTH	J24189059		1-	B	a1
R 1233	CHIP RES.	390k	1/16W	5%	RMC1/16S 394JTH	J24189056		1-	B	b1
R 1235	CHIP RES.	18	1/16W	5%	RMC1/16S 180JTH	J24189004		1-	B	e2
R 1237	CHIP RES.	47	1/16W	5%	RMC1/16S 470JTH	J24189009		1-	B	g2
R 1238	CHIP RES.	680k	1/16W	5%	RMC1/16S 684JTH	J24189059		1-	B	b1
R 1241	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	B	b1
R 1242	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	b1
R 1243	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	A	H3
R 1244	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	c1
R 1245	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	f1
R 1246	CHIP RES.	560k	1/16W	5%	RMC1/16S 564JTH	J24189058		1-	B	b1
R 1249	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	A	H2
R 1250	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	H3
R 1251	CHIP RES.	820k	1/16W	5%	RMC1/16S 824JTH	J24189060		1-	B	b1
R 1252	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	b1
R 1253	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	f1
R 1254	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	e2
R 1255	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	e2
R 1256	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	B	e2
R 1259	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	b1
R 1260	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	b2
R 1261	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	B	e1
R 1262	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	e2
R 1263	CHIP RES.	150k	1/16W	5%	RMC1/16S 154JTH	J24189051		1-	B	e2
R 1264	CHIP RES.	1.2k	1/16W	5%	RMC1/16S 122JTH	J24189026		1-	A	A3
R 1266	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e2
R 1267	CHIP RES.	180	1/16W	5%	RMC1/16S 181JTH	J24189016		1-	A	A3
R 1269	CHIP RES.	1.8k	1/16W	5%	RMC1/16S 182JTH	J24189028		1-	A	A2
R 1270	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	B	d2
R 1271	CHIP RES.	82k	1/16W	5%	RMC1/16S 823JTH	J24189048		1-	B	d3
R 1272	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	B	e2
R 1273	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	e2
R 1274	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	A	A2
R 1275	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d4
R 1277	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	e2
R 1278	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	e1
R 1279	CHIP RES.	8.2k	1/16W	5%	RMC1/16S 822JTH	J24189036		1-	B	d2
R 1280	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d4
R 1281	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	A2
R 1282	CHIP RES.	270	1/10W	5%	RMC1/10T 271J	J24205271		1-	A	A2
R 1283	CHIP RES.	390	1/16W	5%	RMC1/16S 391JTH	J24189020		1-	A	A2
R 1284	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	b2
R 1285	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	d1
R 1286	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	B	e2
R 1287	CHIP RES.	150	1/16W	5%	RMC1/16S 151JTH	J24189015		1-	B	d1
R 1288	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	a2
R 1289	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	E1
R 1290	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	G2
R 1291	CHIP RES.	270	1/16W	5%	RMC1/16S 271JTH	J24189018		1-	B	d1
R 1292	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	B	d1
R 1293	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	A	E1
R 1294	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	E2
R 1295	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	E1
R 1296	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	a2
R 1297	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	G2
R 1298	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	c2
R 1299	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	A	F3
R 1300	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	E2

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1301	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	A	E2
R 1302	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	d3
R 1303	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	A	E2
R 1304	CHIP RES.	470k	1/16W	5%	RMC1/16S 474JTH	J24189057		1-	A	E2
R 1305	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	G2
R 1307	CHIP RES.	680k	1/16W	5%	RMC1/16S 684JTH	J24189059		1-	B	c2
R 1308	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	E2
R 1309	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	d3
R 1310	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	G3
R 1311	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	B	d3
R 1312	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	F3
R 1313	CHIP RES.	150	1/16W	5%	RMC1/16S 151JTH	J24189015		1-	B	d3
R 1314	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	B	c3
R 1315	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	A	G3
R 1317	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	F2
R 1318	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	c3
R 1319	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	B	c2
R 1320	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	c2
R 1321	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	c3
R 1322	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	E1
R 1323	CHIP RES.	2.2k	1/16W	5%	RMC1/16S 222JTH	J24189029		1-	B	d3
R 1324	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	B	c4
R 1325	CHIP RES.	470	1/16W	5%	RMC1/16S 471JTH	J24189021		1-	B	c3
R 1326	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	d2
R 1327	CHIP RES.	680k	1/16W	5%	RMC1/16S 684JTH	J24189059		1-	B	c2
R 1328	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	d1
R 1329	CHIP RES.	22	1/16W	5%	RMC1/16S 220JTH	J24189005		1-	B	c4
R 1330	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	B	c3
R 1331	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1332	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1333	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1334	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1335	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1336	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1337	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1338	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1339	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1340	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1341	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1342	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1343	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1344	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F2
R 1345	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1346	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1347	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1348	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1349	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1350	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1351	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	c1
R 1352	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	E2
R 1353	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	c2
R 1354	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	d1
R 1355	CHIP RES.	68k	1/16W	5%	RMC1/16S 683JTH	J24189047		1-	B	c3
R 1356	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	E2
R 1357	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1358	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1359	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	c3
R 1361	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	c2
R 1362	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	c3
R 1363	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2

Main Unit

Parts List


REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1364	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1365	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1366	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1367	CHIP RES.	22	1/16W	5%	RMC1/16S 220JTH	J24189005		1-	B	c1
R 1368	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1-	B	c2
R 1369	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1370	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1371	CHIP RES.	22	1/16W	5%	RMC1/16S 220JTH	J24189005		1-	B	b3
R 1372	CHIP RES.	3.3k	1/16W	5%	RMC1/16S 332JTH	J24189031		1-	B	d1
R 1373	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1374	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1375	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1376	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1377	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	c3
R 1379	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1380	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1381	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	B	c2
R 1382	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	B	d3
R 1383	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1384	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1385	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1386	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1387	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	d1
R 1388	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	c3
R 1389	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1-	B	c1
R 1390	CHIP RES.	100	1/16W	5%	RMC1/16S 101JTH	J24189013		1-	B	c1
R 1391	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1392	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G2
R 1393	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	d1
R 1394	CHIP RES.	22	1/16W	5%	RMC1/16S 220JTH	J24189005		1-	B	d2
R 1395	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1396	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E2
R 1397	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	B	c3
R 1398	CHIP RES.	82k	1/16W	5%	RMC1/16S 823JTH	J24189048		1-	A	G1
R 1399	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	B	c1
R 1400	CHIP RES.	6.8k	1/16W	5%	RMC1/16S 682JTH	J24189035		1-	B	c2
R 1401	CHIP RES.	39k	1/16W	5%	RMC1/16S 393JTH	J24189044		1-	A	G2
R 1402	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	b1
R 1403	CHIP RES.	20k	1/16W	0.5%	RR0510R-203-D	J24189150		1-	A	G2
R 1404	CHIP RES.	5.6k	1/16W	5%	RMC1/16S 562JTH	J24189034		1-	B	c1
R 1405	CHIP RES.	68k	1/16W	5%	RMC1/16S 683JTH	J24189047		1-	B	c2
R 1406	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	A	G1
R 1407	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	F3
R 1408	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1409	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1410	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	F2
R 1411	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	b1
R 1412	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1413	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1414	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	c1
R 1415	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	F2
R 1416	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	A	F2
R 1417	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1418	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1419	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1420	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1421	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	F2
R 1422	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	a1
R 1424	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1425	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 1426	CHIP RES.	100k	1/16W	5%	RMC1/16S 104JTH	J24189049		1-	A	F3
R 1427	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	F2
R 1428	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	A	F2
R 1429	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1430	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1431	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1432	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1433	CHIP RES.	330k	1/16W	5%	RMC1/16S 334JTH	J24189055		1-	B	c1
R 1434	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1435	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1436	CHIP RES.	220k	1/16W	5%	RMC1/16S 224JTH	J24189053		1-	B	c1
R 1437	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1438	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1439	CHIP RES.	4.7k	1/16W	5%	RMC1/16S 472JTH	J24189033		1-	A	G3
R 1440	CHIP RES.	1M	1/16W	5%	RMC1/16S 105JTH	J24189061		1-	B	c1
R 1441	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1442	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1443	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1444	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1445	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1446	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1447	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1448	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1449	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1450	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1451	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1452	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1453	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1454	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1455	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1456	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	F1
R 1457	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1458	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1459	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1460	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	G1
R 1461	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	A	E1
R 1462	CHIP RES.	18	1/16W	5%	RMC1/16S 180JTH	J24189004		1-	B	g2
R 1463	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	a3
R 1464	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	B3
R 1465	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	B3
R 1466	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	B	a1
R 1467	CHIP RES.	68k	1/16W	5%	RMC1/16S 683JTH	J24189047		1-	B	a1
R 1468	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	G3
R 1469	CHIP RES.	18	1/16W	5%	RMC1/16S 180JTH	J24189004		1-	B	d3
R 1470	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	e3
R 1471	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	d3
R 1475	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	f1
R 1476	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	B	e3
R 1477	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	A	H2
R 1478	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	H2
R 1479	CHIP RES.	56k	1/16W	5%	RMC1/16S 563JTH	J24189046		1-	A	C1
R 1480	CHIP RES.	33k	1/16W	5%	RMC1/16S 333JTH	J24189043		1-	A	C1
R 1481	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	E1
R 1482	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	B3
R 1485	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	A	B3
R 1486	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	C1
R 1487	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	g2
R 1488	CHIP RES.	330	1/16W	5%	RMC1/16S 331JTH	J24189019		1-	B	g2
R 1489	CHIP RES.	0	1/16W	5%	RMC1/16S JPTH	J24189070		1-	A	G2
R 1490	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-		


Main Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
S 1001	TACT SWITCH				SKRTLAE010	N5090130		1-	A	A3
S 1002	TACT SWITCH				SKRTLAE010	N5090130		1-	B	h4
S 1003	TACT SWITCH				SKRTLAE010	N5090130		1-	B	g4
S 1004	TACT SWITCH				SKRTLAE010	N5090130		1-	B	e4
S 1005	TACT SWITCH				SKRTLAE010	N5090130		1-	B	d4
S 1006	ROTARY SWITCH				EC10SP16-93A0	Q9000820		1-	B	h2
S 1007	TOGGLE SWITCH				ATE1E-5M3-17-Z	N2090074		1-	A	A2
T 1001	BALUN TRANSFORMERS				B5F458DB-1414=P3	L0190256		1-	B	g1
T 1002	BALUN TRANSFORMERS				B5F458DB-1414=P3	L0190256		1-	B	g2
T 1003	BALUN TRANSFORMERS				B5F458PT-1417=P3	L0190258		1-	B	f1
TH1001	THERMISTOR				TH05 4B473FR	G9090150		1-	A	F2
VR1001	POT.				TP76N1034N A203 RY-7671	J60800281		1-	B	h1
X 1001	XTAL NX1255GC	4.194304MHz			4.194304MHz	H0103309		1-	A	H3
X 1002	XTAL U2G	7.3728MHz			7.3728MHZ	H0103281		1-	A	F3
X 1003	TCXO	16.8MHz			TTS05VS-M1 16.8MHZ	H9500830		1-	B	c3
XF1001	XTAL FILTER				MFT50.85P 50.85MHZ	H1102361		1-	B	e1
	SHIELD CASE VCO					RA0697500		1-		
	SHIELD CASE VCO					RA069750A		4-		
	SHIELD CASE COVER				(MIX)	RA0697600		1-		
	PAD				(E1)	RA0731500		1-		
	PAD				(E2)	RA0731600		1-		






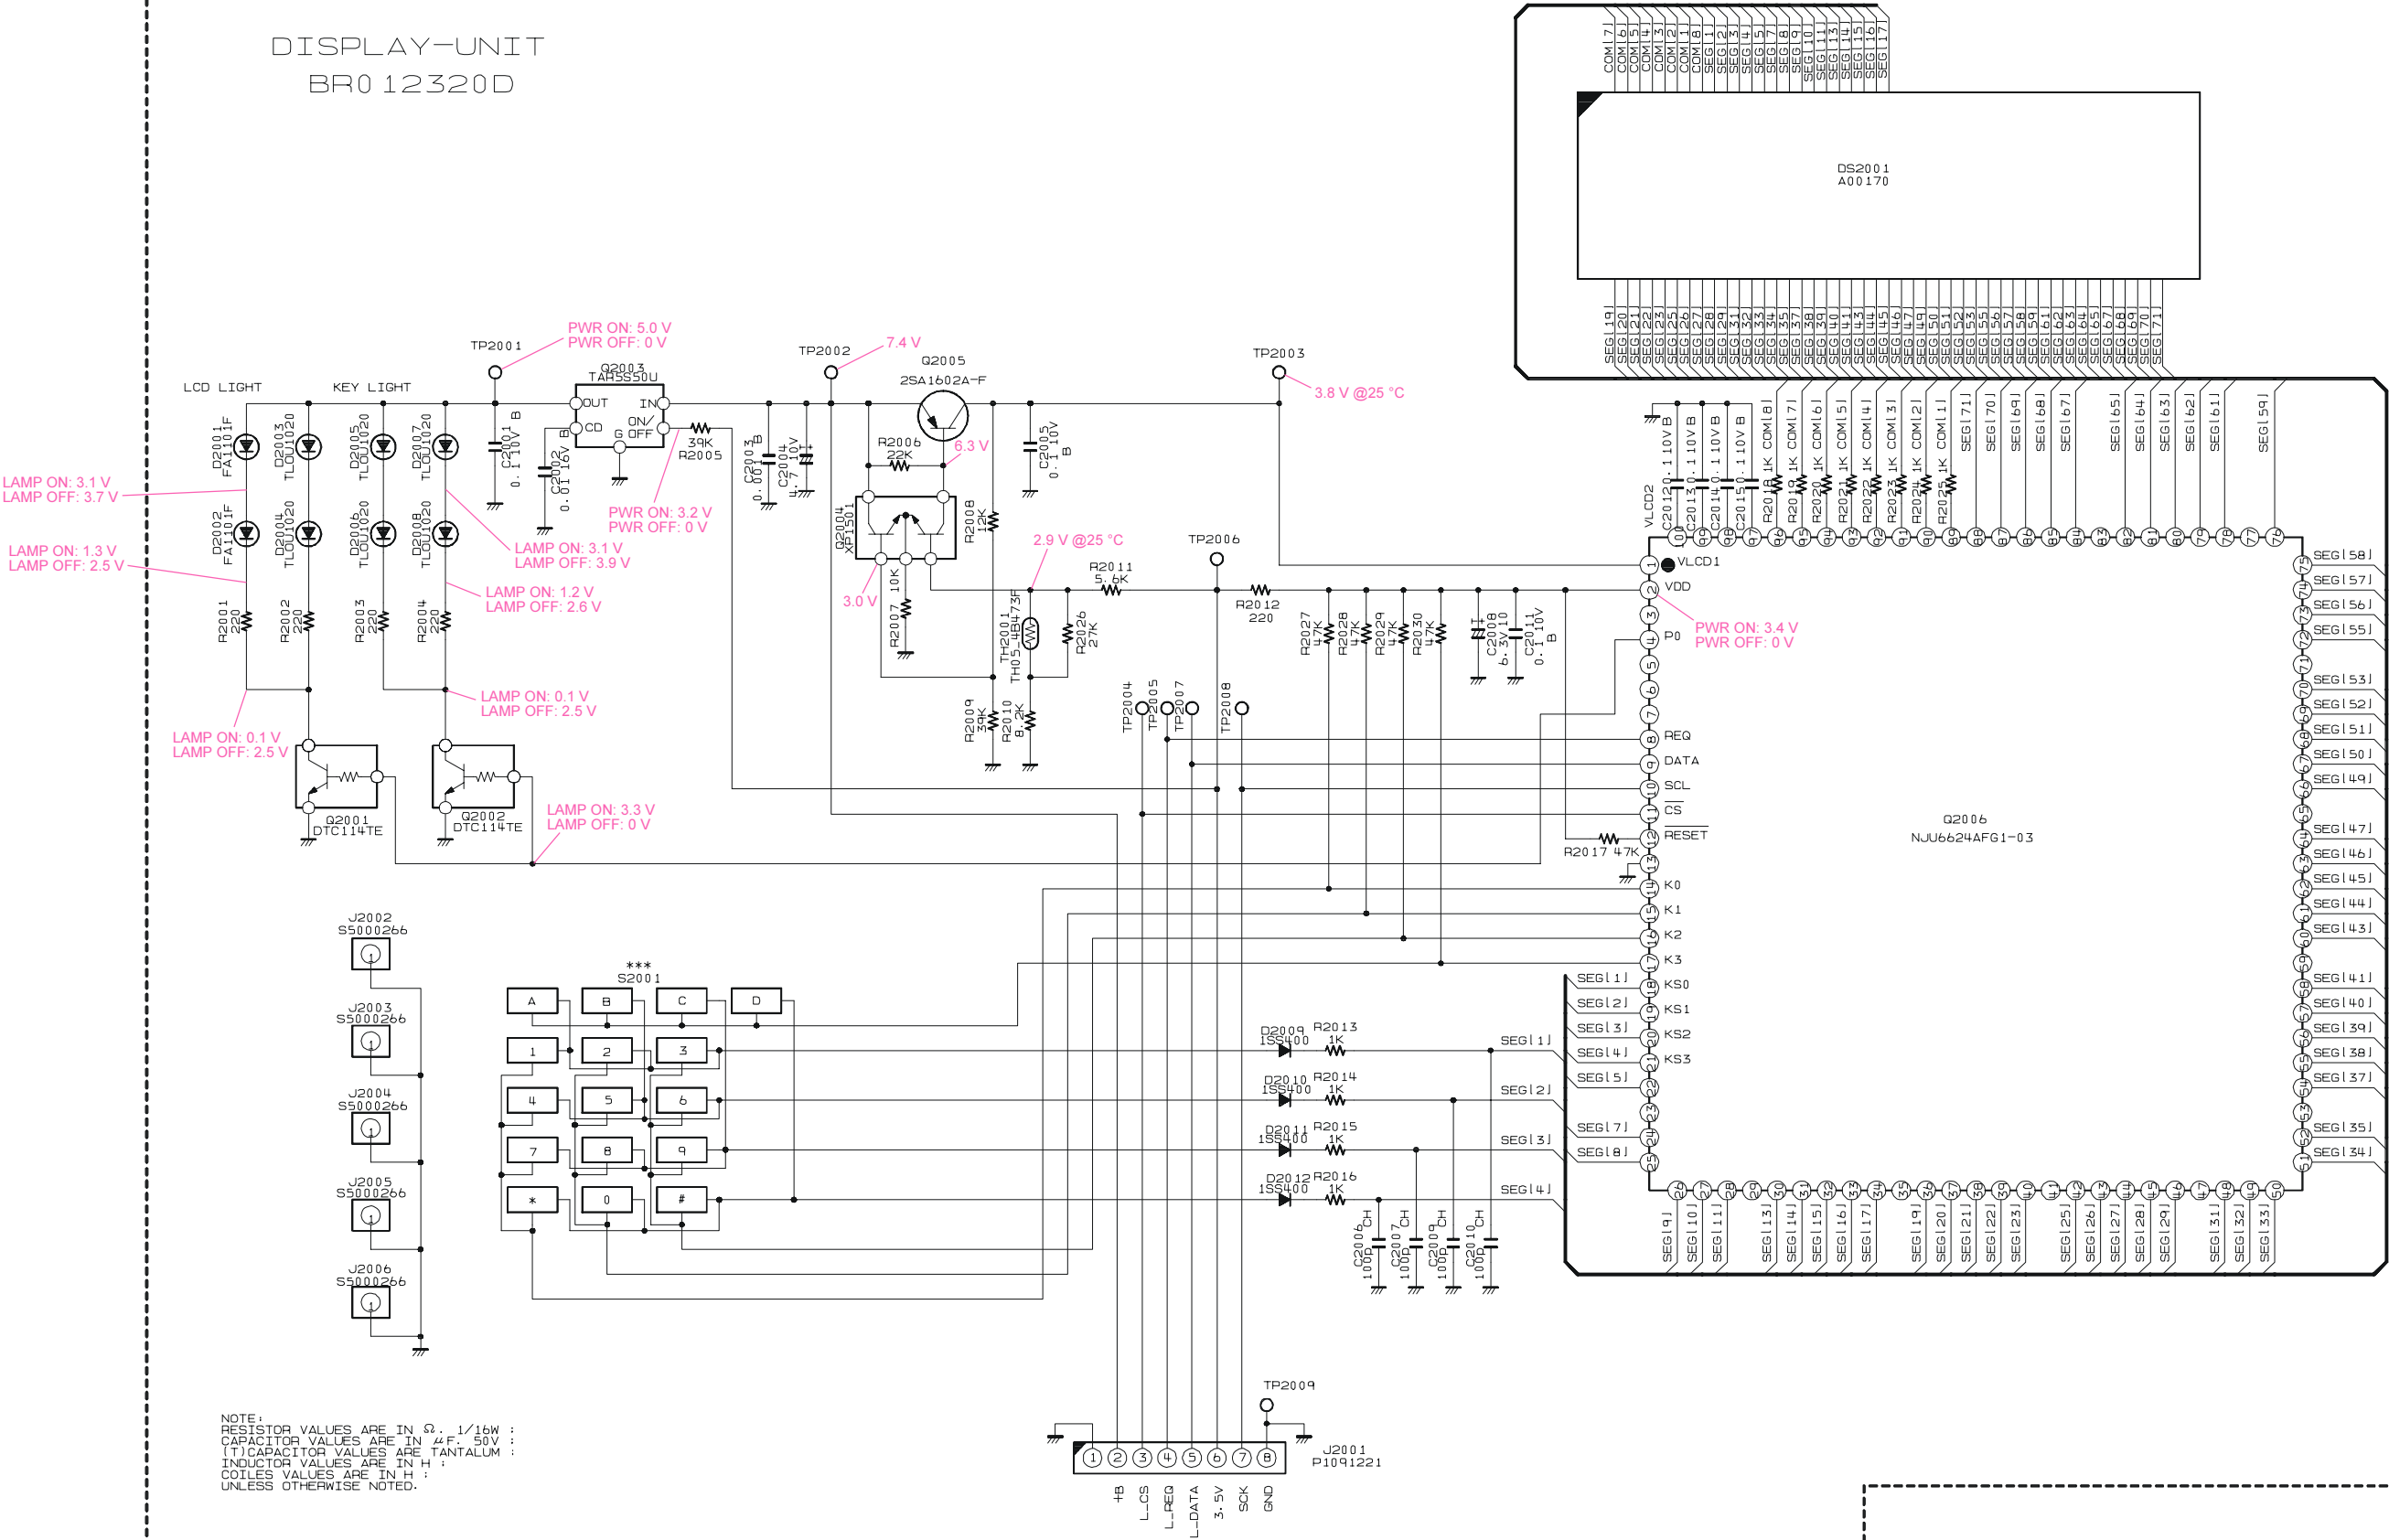


Display Unit
Parts Layout (Side A)

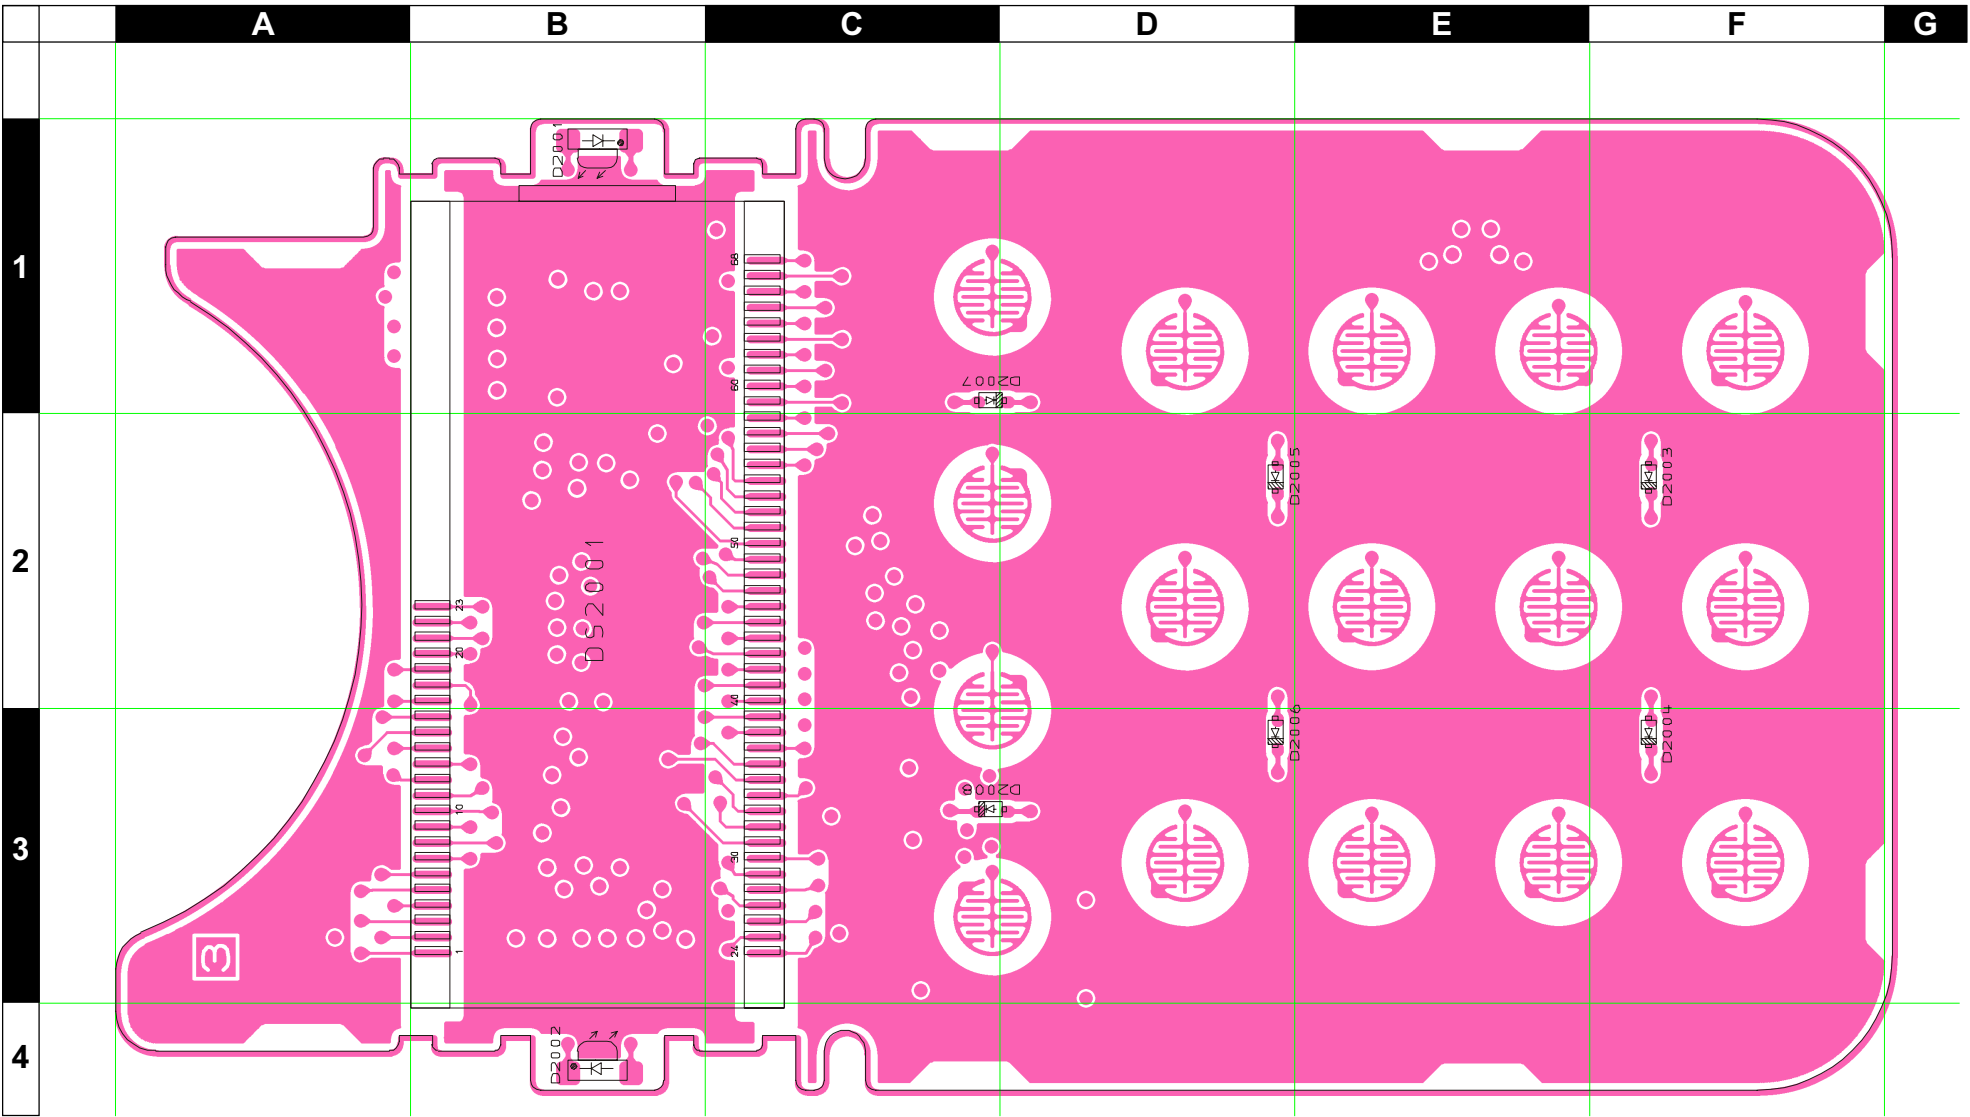

Display Unit

Parts Layout (Side B)

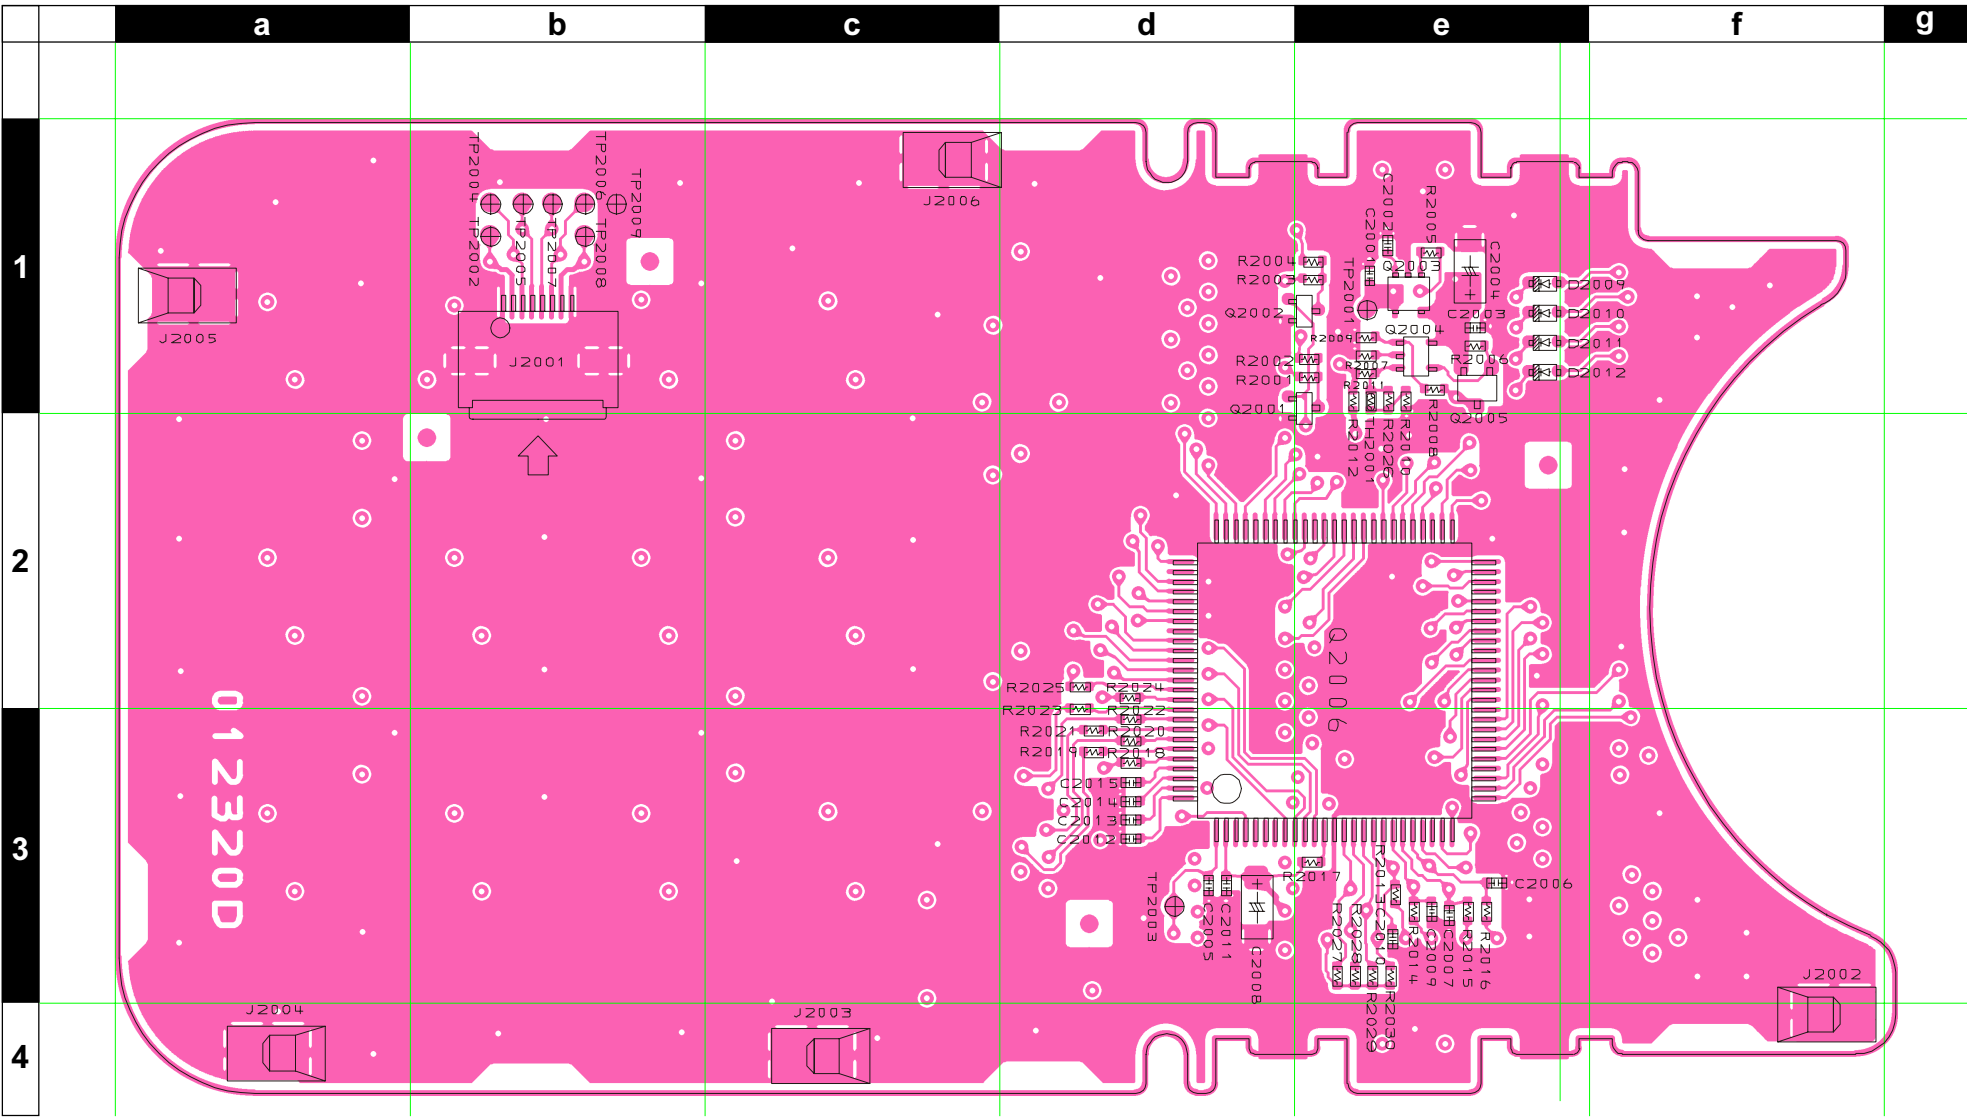

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
PCB with Components						CB2255001	LCD: ON			
Printed Circuit Board						AC033N000	FR0123200	1-		
C 2001	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	e1
C 2002	CHIP CAP.	0.01uF	16V	B	GRM36B103K16PT	K22128804		1-	B	e1
C 2003	CHIP CAP.	0.001uF	50V	B	GRM155B11H102KA01D	K22178809		1-	B	e1
C 2004	CHIP TA.CAP.	4.7uF	10V		TEMSVA1A475M-8R	K78100022		1-	B	e1
C 2005	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 2006	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	e3
C 2007	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	e3
C 2008	CHIP TA.CAP.	10uF	6.3V		TEMSVA0J106M-8R	K78080027		1-	B	d3
C 2009	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	e3
C 2010	CHIP CAP.	100pF	50V	CH	GRM1552C1H101JD01D	K22178236		1-	B	e3
C 2011	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 2012	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 2013	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 2014	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
C 2015	CHIP CAP.	0.1uF	10V	B	GRM36B104K10PT	K22108802		1-	B	d3
D 2001	LED				FA1101F-TR	G2070842		1-	A	B1
D 2002	LED				FA1101F-TR	G2070842		1-	A	B4
D 2003	LED				TLOU1020(T14)	G2070990		1-	A	F2
D 2004	LED				TLOU1020(T14)	G2070990		1-	A	F3
D 2005	LED				TLOU1020(T14)	G2070990		1-	A	D2
D 2006	LED				TLOU1020(T14)	G2070990		1-	A	D3
D 2007	LED				TLOU1020(T14)	G2070990		1-	A	C1
D 2008	LED				TLOU1020(T14)	G2070990		1-	A	C3
D 2009	DIODE				1SS400 TE61	G2070634		1-	B	e1
D 2010	DIODE				1SS400 TE61	G2070634		1-	B	e1
D 2011	DIODE				1SS400 TE61	G2070634		1-	B	e1
D 2012	DIODE				1SS400 TE61	G2070634		1-	B	e1
DS2001	LCD				A00170	G6090163		1-	A	B2
J 2001	CONNECTOR				9637S-08A-Y905	P1091221		1-	B	b1
J 2002	SHIELD FINGER				E01J3028Y	S5000266		1-	B	f4
J 2003	SHIELD FINGER				E01J3028Y	S5000266		1-	B	c4
J 2004	SHIELD FINGER				E01J3028Y	S5000266		1-	B	a4
J 2005	SHIELD FINGER				E01J3028Y	S5000266		1-	B	a1
J 2006	SHIELD FINGER				E01J3028Y	S5000266		1-	B	c1
P 2001	WIRE ASSY				AC033	T9207204	W/LCD	1-		
Q 2001	TRANSISTOR				DTC114TE TL	G3070225		1-	B	e1
Q 2002	TRANSISTOR				DTC114TE TL	G3070225		1-	B	e1
Q 2003	IC				TAR5S50U	G1094097		1-	B	e1
Q 2004	TRANSISTOR				XP1501-(TX)	G3070143		1-	B	e1
Q 2005	TRANSISTOR				2SA1602A-T11-1F	G3116028F		1-	B	e1
Q 2006	IC				NJU6624AFG1-03	G1093881		1-	B	e2
R 2001	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e1
R 2002	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e1
R 2003	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e1
R 2004	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e1
R 2005	CHIP RES.	39k	1/16W	5%	RMC1/16S 393JTH	J24189044		1-	B	e1
R 2006	CHIP RES.	22k	1/16W	5%	RMC1/16S 223JTH	J24189041		1-	B	e1
R 2007	CHIP RES.	10k	1/16W	5%	RMC1/16S 103JTH	J24189037		1-	B	e1
R 2008	CHIP RES.	12k	1/16W	5%	RMC1/16S 123JTH	J24189038		1-	B	e1
R 2009	CHIP RES.	39k	1/16W	5%	RMC1/16S 393JTH	J24189044		1-	B	e1
R 2010	CHIP RES.	8.2k	1/16W	5%	RMC1/16S 822JTH	J24189036		1-	B	e1
R 2011	CHIP RES.	5.6k	1/16W	5%	RMC1/16S 562JTH	J24189034		1-	B	e1
R 2012	CHIP RES.	220	1/16W	5%	RMC1/16S 221JTH	J24189017		1-	B	e1
R 2013	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	e3
R 2014	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	e3
R 2015	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	e3
R 2016	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	e3
R 2017	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	e3


Display Unit

Parts List


REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2018	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d3
R 2019	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d3
R 2020	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d3
R 2021	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d3
R 2022	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d3
R 2023	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d2
R 2024	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d2
R 2025	CHIP RES.	1k	1/16W	5%	RMC1/16S 102JTH	J24189025		1-	B	d2
R 2026	CHIP RES.	27k	1/16W	5%	RMC1/16S 273JTH	J24189042		1-	B	e1
R 2027	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	e3
R 2028	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	e3
R 2029	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	e3
R 2030	CHIP RES.	47k	1/16W	5%	RMC1/16S 473JTH	J24189045		1-	B	e3
TH2001	THERMISTOR				TH05 4B473FR	G9090150		1-	B	e1
	FRAME				(LCD)	RA0689700	W/LCD	1		
	FRAME				(LCD)	RA068970A	W/LCD	2-		
	LIGHT GUIDE				(LCD)	RA0689100	W/LCD	1-		
	REFLECTOR SHEET					RA0698000	W/LCD	1-		
	INTERCONNECTOR					RA0663700		1-		
	SPONGE RUBBER				(LCD)	RA0699300		1-		
	PAD				(LCD)	RA0727300		1-		

Cable Unit

Circuit Diagram

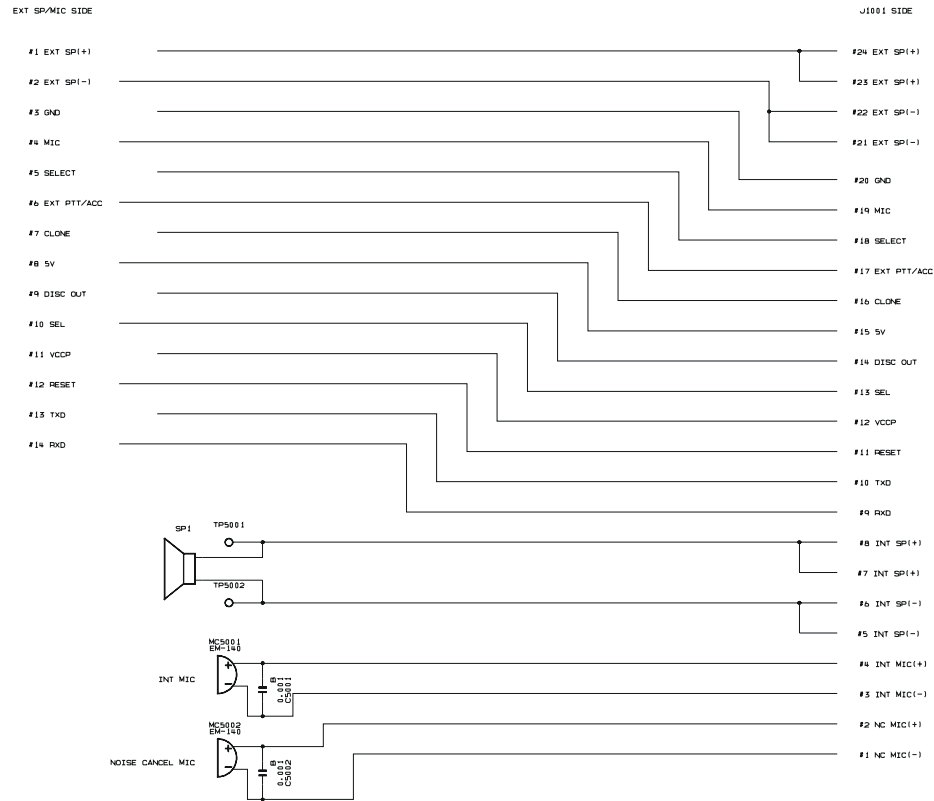

Parts Layout

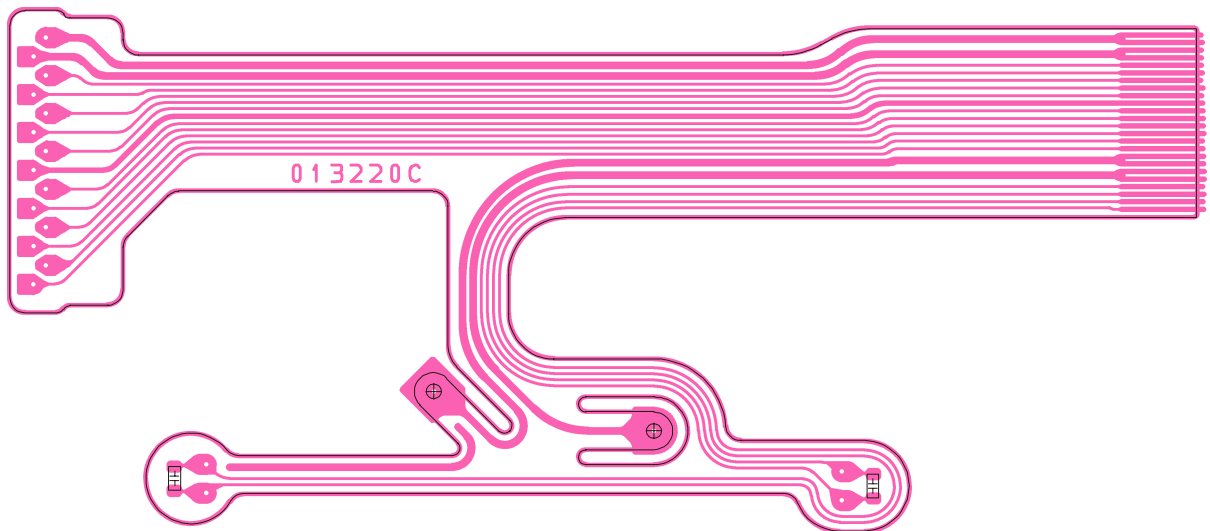

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
Printed Circuit Board					AC033N000	FR013220C				
C 5001	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		1-		
C 5002	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		1-		
MC5001	MIC. ELEMENT				EM-140	M3290032		1-		
MC5002	MIC. ELEMENT				EM-140	M3290032		1-		
Z 5001	MIC HOLDER RUBBER				(C)	RA0725900		1-		



Copyright 2004
VERTEX STANDARD CO., LTD.
All rights reserved

No portion of this manual
may be reproduced without
the permission of
VERTEX STANDARD CO., LTD.